

# FLOS

FA53907533 Anthracite

## Dooku 400 Wall Symmetric Optic


Designed by FLOS Outdoor, 2014



LED source included. Integrated power supply 220-240V ON/OFF and dimmable 1-10V or DALI. Fixing bracket included. Equipped with a 400mm protruding neoprene cable section and IP68 connectors. Smart-City version available upon request.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

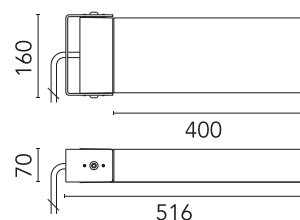

### Main specifications

|                        |               |
|------------------------|---------------|
| EAN                    | 8054793682495 |
| Mounting               | Wall          |
| Light source type      | LED           |
| Light sources included | Yes           |
| LED type               | Power LED     |
| Number of lamps        | 1             |
| Power (W)              | 34            |
| System power (W)       | 39            |
| Source flux (lm)       | 4416          |
| Lumen Output (lm)      | 3198          |

### Physical

|                          |            |
|--------------------------|------------|
| Colour                   | Anthracite |
| Orientation              | Adjustable |
| Longitudinal tilting (°) | 90         |
| Net weight (kg)          | 5.1        |
| Package height (mm)      | 140        |
| Package width (mm)       | 535        |
| Package length (mm)      | 200        |
| Package volume (m3)      | 0.01       |
| IP internal              | 65         |

### Download

[Mounting instructions](#)  ZIP

### Photometric Files

[LDT / IES](#)  ZIP


### Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



## Schematic light drawing



| h(m) | E(lx) | D(m)  |
|------|-------|-------|
| 1    | 948   | 3.54  |
| 2    | 237   | 7.09  |
| 3    | 105   | 10.63 |
| 4    | 59    | 14.18 |
| 5    | 38    | 17.72 |

## Photometric

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| Light distribution     | Symmetric |
| CCT (K)                | 3000      |
| CRI>                   | 80        |
| Beam angle C0-180 (°)  | 120       |
| Beam angle C90-270 (°) | 120       |
| Extreme cut off        | No        |

## Electrical


|                    |              |
|--------------------|--------------|
| Insulation class   | I            |
| Frequency (Hz)     | 50/60        |
| Main voltage (Vac) | 220-240      |
| Power supply       | Integrated   |
| Dimmable           | No           |
| Power supply type  | Non Dimmable |
| Dimming interface  | Not Dimmable |
| Emergency          | No           |

## Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E

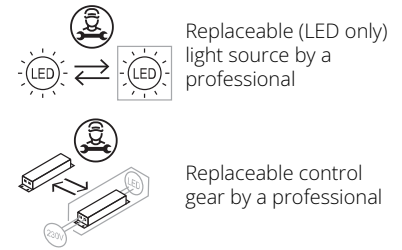

## Accessories & Power Supply



OPTIONAL  
Accessory

F990E00A000

S.P.D. (SURGE PROTECTION  
DEVICE)