

# FLOS



FA53901833-310 Anthracite


## Dooku 600 Double Top Pole Ø76 mm Foot&Cycle Optic Dimmable 1-10V

Designed by FLOS Outdoor, 2014



2 x 67W - 2 x 13416lm - 3000K - CRI> 80

LED source included. Integrated power supply 220-240V ON/OFF and dimmable 1-10V or DALI. Fixing bracket included. Equipped with a 400mm protruding neoprene cable section and IP68 connectors. Double socket for 76mm diameter post. The post must be ordered separately. Smart-City version available upon request.

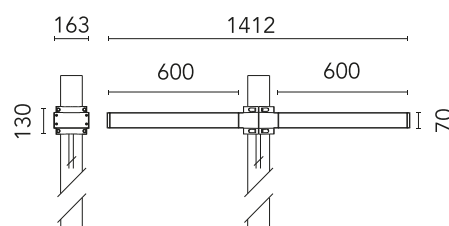

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

|                        |               |
|------------------------|---------------|
| EAN                    | 8054793679747 |
| Mounting               | Pole Top      |
| Light source type      | LED           |
| Light sources included | Yes           |
| LED type               | Power LED     |
| Number of lamps        | 2             |
| Power (W)              | 67            |
| System power (W)       | 2X78          |
| Source flux (lm)       | 17664         |
| Lumen Output (lm)      | 13416         |

### Physical

|                     |            |
|---------------------|------------|
| Colour              | Anthracite |
| Orientation         | Fixed      |
| Net weight (kg)     | 13.8       |
| Package height (mm) | 825        |
| Package width (mm)  | 380        |
| Package length (mm) | 185        |
| Package volume (m3) | 0.06       |
| IP internal         | 65         |

### Download

[Mounting instructions](#)  ZIP

### Photometric Files

[LDT / IES](#)  ZIP


### Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



Schematic light drawing



Photometric

|                    |            |
|--------------------|------------|
| Lighting type      | Direct     |
| Light distribution | Asymmetric |
| CCT (K)            | 3000       |
| CRI>               | 80         |
| Extreme cut off    | No         |

Electrical

|                    |                   |
|--------------------|-------------------|
| Insulation class   | I                 |
| Frequency (Hz)     | 50/60             |
| Main voltage (Vac) | 220-240           |
| Power supply       | Integrated        |
| Dimmable           | Yes               |
| Power supply type  | Dimmable 1-10V    |
| Dimming interface  | Dimmer Integrated |
| Emergency          | No                |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E

Replaceable (LED only) light source by a professional

Replaceable control gear by a professional

Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

Accessories & Power Supply



REQUIRED  
Pole

FA24833  
Pole Ø76 mm h 3500 mm(with  
Base)



REQUIRED  
Pole

FA25033  
Pole Ø76 mm h 3500 mm (+500  
mm In-ground)




REQUIRED  
Pole

FA24933  
Pole Ø76 mm h 4500 mm(with  
Base)



REQUIRED  
Pole

FA25133  
Pole Ø76 mm h 4500 mm (+500  
mm In-ground)



OPTIONAL  
Accessory

F990E00A000  
S.P.D. (SURGE PROTECTION  
DEVICE)



OPTIONAL  
Accessory

FA116  
Base Plate and Fixing Bolts for  
Pole Ø 102 mm h 4000/5000 mm  
with Base