

FLOS

FA53901206-300 Grey


Dooku 600 Double Top Pole Ø76 mm Symmetric Optic Dimmable Dali

Designed by FLOS Outdoor, 2014



2 x 67W - 2 x 14526lm - 3000K - CRI> 80 - Beam° 120

LED source included. Integrated power supply 220-240V ON/OFF and dimmable 1-10V or DALI. Fixing bracket included. Equipped with a 400mm protruding neoprene cable section and IP68 connectors. Double socket for 76mm diameter post. The post must be ordered separately. Smart-City version available upon request.

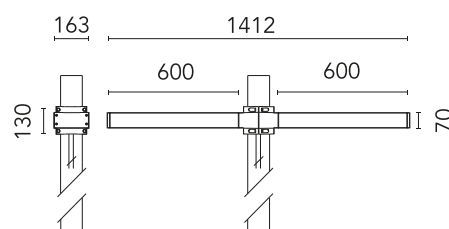

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8054793679525
Mounting	Pole Top
Light source type	LED
Light sources included	Yes
LED type	Power LED
Number of lamps	2
Power (W)	67
System power (W)	2X78
Source flux (lm)	17664
Lumen Output (lm)	14526

Physical

Colour	Grey
Orientation	Fixed
Net weight (kg)	13.8
Package height (mm)	825
Package width (mm)	380
Package length (mm)	185
Package volume (m3)	0.06
IP internal	65

Download

[Mounting instructions](#)  ZIP

Photometric Files

[LDT / IES](#)  ZIP


Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	80
Beam angle C0-180 (°)	120
Beam angle C90-270 (°)	120
Extreme cut off	No

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable DALI 1
Dimming interface	Dimmer Integrated
Emergency	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E

Replaceable (LED only) light source by a professional

Replaceable control gear by a professional

Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

Accessories & Power Supply



REQUIRED
Pole

FA24833
Pole Ø76 mm h 3500 mm(with
Base)



REQUIRED
Pole

FA25033
Pole Ø76 mm h 3500 mm (+500
mm In-ground)




REQUIRED
Pole

FA24933
Pole Ø76 mm h 4500 mm(with
Base)



REQUIRED
Pole

FA25133
Pole Ø76 mm h 4500 mm (+500
mm In-ground)



OPTIONAL
Accessory

F990E00A000
S.P.D. (SURGE PROTECTION
DEVICE)



OPTIONAL
Accessory

FA116
Base Plate and Fixing Bolts for
Pole Ø 102 mm h 4000/5000 mm
with Base