

05.7633.B1B9S White

## Easy Kap Ø30 Adjustable Set of 4 spots Non-IC

Designed by FLOS Architectural, 2023

LED - Power LED - 4 x 2.5W - 4 x 219lm - 2700K - CRI> 90 - Beam° 51

NON-IC Ceiling Recessed Trimless Downlight. Recessed luminaire with LED light source. Power supply not included. Installation frame not necessary. Class 2



Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

|                        |                  |
|------------------------|------------------|
| Mounting               | Ceiling recessed |
| Light Source Type      | LED              |
| Light sources included | Yes              |
| LED type               | Power LED        |
| Lamp category          | LED              |
| Number of lamps        | 4                |
| Power (W)              | 2.5              |
| System power (W)       | 4.3              |
| Source flux (lm)       | 247              |
| System flux (lm)       | 219              |
| Efficacy (lm/W)        | 51               |

### Physical


|                          |            |
|--------------------------|------------|
| Color                    | White      |
| Trim                     | Yes        |
| Orientation              | Adjustable |
| Longitudinal tilting (°) | 17         |
| Transversal tilting (°)  | 17         |
| Length (in)              | 1.4        |
| IP internal              | 20         |
| IP external              | 54         |




### Download

|                       |                     |
|-----------------------|---------------------|
| Family spec sheet     | <a href="#">ZIP</a> |
| Mounting instructions | <a href="#">PDF</a> |

### Ecodesign and Energy Labelling

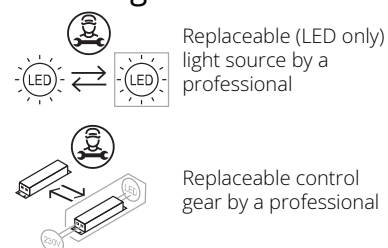

Schematic light drawing



Photometric

|                          |                       |
|--------------------------|-----------------------|
| Lighting type            | Direct                |
| Light distribution       | Symmetric             |
| CCT (K)                  | 2700                  |
| CRI>                     | 90                    |
| McAdam steps (SDCM)      | 3                     |
| Rf fidelity index        | 89                    |
| Rg gamut index           | 101                   |
| LED Life / Failure Ratio | L90B50>51.000h_Tc85°C |
| Beam angle C0-180 (°)    | 51                    |
| Beam angle C90-270 (°)   | 51                    |
| Extreme cut off          | No                    |
| UGRL                     | <19                   |

Electrical

|                     |                                                                  |
|---------------------|------------------------------------------------------------------|
| Forward voltage (V) | 3.3                                                              |
| LED current (mA)    | 800                                                              |
| Driver              | Remote excluded                                                  |
| Dimming type        | Non Dimmable, Mains Cut Dimming, Dimmable DALI 2, Dimmable 1-10V |
| Dimming interface   | Remote Dimmable (Dimmer Not Included)                            |

Accessories & Power Supply



REQUIRED  
Power supply

ACCESSORYTYPE1

LEDSB40W800MA-V-Y1  
LED DVR Variable Dim Triac, ELV,  
40W, 800mA ,120/277V.



REQUIRED  
Power supply

ACCESSORYTYPE1

SP12W850MA-DAL-T01  
Splice Box UL 7"x3-5/8"x1-1/4",  
With Eldoled Eco Drive Driver  
Programmed to 850mA,12WDALI  
Dimmable, 120-277V.



REQUIRED  
Power supply

ACCESSORYTYPE1

SP12W850MA-10V-T01  
Splice Box UL 7"x3-5/8"x1-1/4",  
With Eldoled Eco Drive Driver  
Programmed to 850mA, 12W, 0-  
10V Dimmable, 120-277V.