

03.4212.B1 White

## Easy Kap 80 Square Adjustable

Designed by FLOS Architectural, 2016


LED retrofit

Recessed 12V lamp luminaire. Remote transformer not included. Installation frame not necessary.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Ceiling recessed    |
| Environments           | Indoor dry location |
| Light source type      | Bulb                |
| Light sources included | no                  |
| Lamp category          | LED retrofit        |
| Lamp type              | QR-CBC 51           |
| Lamp holders           | GX5.3               |
| Number of lamps        | 1                   |


### Physical

|                          |            |
|--------------------------|------------|
| Colour                   | White      |
| Trim                     | Yes        |
| Orientation              | Adjustable |
| Rotation (°)             | 360        |
| Longitudinal tilting (°) | 20         |
| Transversal tilting (°)  | 20         |
| Recessed depth (mm)      | 130        |
| Spot diameter (mm)       | 80         |
| Length (mm)              | 80         |
| Net weight (kg)          | 0.12       |
| Package height (mm)      | 90         |
| Package width (mm)       | 140        |
| Package length (mm)      | 105        |
| IP internal              | 20         |
| IP external              | 23         |

### Download

|                       |                              |
|-----------------------|------------------------------|
| Mounting instructions | <a href="#">Download PDF</a> |
| Item information      | <a href="#">Download JPG</a> |

### Ecodesign and Energy Labelling

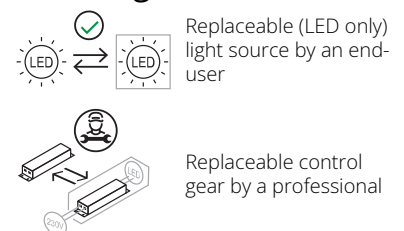

Photometric

|                    |           |
|--------------------|-----------|
| Lighting type      | Direct    |
| Light distribution | Symmetric |

Electrical

|                     |                 |
|---------------------|-----------------|
| Insulation class    | III             |
| Forward voltage (V) | 12              |
| Power supply        | Remote excluded |

Notes

Not suitable for lens accessories. Check your lamp dimentions to match the product.

