

## Eclectic 70 Fixed Soft

Designed by FLOS Architectural, 2022




7.5W - 592lm - 3000K - CRI> 90 - Beam° 35

Eclectic Ø70. Non-adjustable Downlight. "Soft" style façade. Necessary installation pre-frames, not included (to be ordered separately). Recessed position of the LED: 47° cut-off angle. IP54 water tightness. Alternative options for lenses, orientation modules and style façades are available as spare parts.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Ceiling recessed    |
| Environments           | Indoor dry location |
| Light source type      | LED                 |
| Light sources included | Yes                 |
| LED type               | LED array           |
| Number of lamps        | 1                   |
| Power (W)              | 7.5                 |
| System power (W)       | 9.9                 |
| Lumen Output (lm)      | 592                 |
| Efficacy (lm/W)        | 79                  |

### Physical

|                     |       |
|---------------------|-------|
| Colour              | Black |
| Orientation         | Fixed |
| Recessed depth (mm) | 134   |
| Spot diameter (mm)  | 75    |
| Length (mm)         | 75    |
| Net weight (kg)     | 0.16  |
| Package height (mm) | 90    |
| Package width (mm)  | 140   |
| Package length (mm) | 105   |
| IP internal         | 54    |

### Download

Mounting instructions [Download PDF](#)

### Photometric Files

LDT / IES [Download ZIP](#)

### Technical Drawings


2D [Download ZIP](#)

3D [Download ZIP](#)

[Bim](#) [Download ZIP](#)



Schematic light drawing



Photometric

|                          |                        |
|--------------------------|------------------------|
| Lighting type            | Direct                 |
| Light distribution       | Symmetric              |
| CCT (K)                  | 3000                   |
| CRI>                     | 90                     |
| McAdam steps (SDCM)      | 2                      |
| Rf fidelity index        | 92                     |
| Rg gamut index           | 98                     |
| LED Life / Failure Ratio | L70B50>55.000h_Tc=85°C |
| Beam angle C0-180 (°)    | 35                     |
| Beam angle C90-270 (°)   | 35                     |
| UGRL                     | <10                    |

Electrical

|                   |                                                                                                     |
|-------------------|-----------------------------------------------------------------------------------------------------|
| Insulation class  | III                                                                                                 |
| LED current (mA)  | 600                                                                                                 |
| Power supply      | Remote                                                                                              |
| Dimmable          | Yes                                                                                                 |
| Power supply type | Dimmable Casambi, Mains Cut Dimming, Dimmable 0-10V, Dimmable DALI 2, Dimmable 1-10V, Dimmable Push |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E

Replaceable (LED only) light source by a professional

Replaceable control gear by a professional





REQUIRED  
Power supply

ACCESSORYTYPE1

60.9467

Mains dimming 20W Constant current power supply, AC phase-cut adjustable, trailing & leading edge dimming, 220/240V - 50/60Hz, with dip-switch programmable power supply current. Output current: 900mA - 20W / 850mA - 20W / 800mA - 20W / 750mA - 20W / 70...



REQUIRED  
Power supply

ACCESSORYTYPE1

60.9162

Continuous current power supply 220/240V - 50/60Hz. Adjustable Current 300mA-13W / 350mA-15W / 400mA-18W / 450mA-20W / 500mA-22W / 550mA-24W / 600mA-27W / 650mA-29W / 700mA-31W / 750mA-32W / 800mA-33W / 850mA-35W / 900mA-38W / 950mA-40W / 1000/1050mA-4...



REQUIRED  
Power supply

ACCESSORYTYPE1

60.9592

Non dimmable continuous current power supply. 15-30W, 220/240V -50/60Hz with power current selected through adjustable switch. 350mA - 15W / 400mA - 17W / 450mA - 19W / 500mA - 22W / 550mA - 24W / 600mA - 26W / 650mA - 28W / 700mA - 30W.



REQUIRED  
Power supply

ACCESSORYTYPE1

60.9208

Continuous current power supply of 13-20W - Dim 1-10V&Push - 110/240V - 50/60Hz with power current selected through adjustable



REQUIRED  
Power supply

ACCESSORYTYPE1

60.9845

Continuous current power supply 40W, 220/240V - 50/60Hz with power current selected through adjustable switch. Dimmable 0-10V/PWM/RX. Output current: 1050mA - 40W / 1000mA - 40W / 950mA - 40W / 900mA - 37W / 850mA - 35W / 800mA - 33W / 750mA - 31W / 70...



REQUIRED  
Power supply

ACCESSORYTYPE1

60.7785

Constant current power supply 42W, 220-240V CASAMBI dimmable.



REQUIRED  
Frame

ACCESSORYTYPE2

08.0670.14

Trim Frame



REQUIRED  
Frame

ACCESSORYTYPE2

08.0670.40

Trim Frame



REQUIRED  
Frame

ACCESSORYTYPE2

08.0672.00

No Trim Frame




REQUIRED  
Power supply

ACCESSORYTYPE1

60.9713.0600

600mA, 20 W, 220/240 V - 50/60  
Hz constant current power  
supply. Dimmable by Dali2




REQUIRED  
Power supply

ACCESSORYTYPE1

60.7678

Continuous current supply source  
of 240V - 50/60Hz with dimmable  
Dali 2, Push dimming. 150mA -  
7.8W / 200mA - 10.4W / 250mA -  
13W / 300mA - 15.6W / 350mA -  
18.2W / 400mA - 20.8W / 500mA -  
26W / 600mA - 31.2W / 700mA -  
36.4W / 750mA - 39W / 800mA -  
41.6...



OPTIONAL  
Accessory

ACCESSORYTYPE4

08.0727.00

Honeycomb for Eclectic 70



OPTIONAL  
Filter

ACCESSORYTYPE4

08.0731.00

Colour Temperature Increaser for  
Eclectic 70




OPTIONAL  
Filter

ACCESSORYTYPE4

08.0732.00

Colour Temperature Decreaser  
for Eclectic 70

Spare Parts

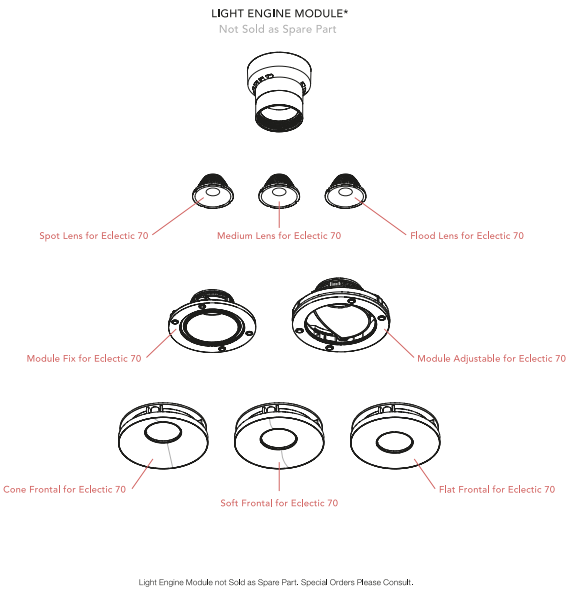

|   |                                   |            |
|---|-----------------------------------|------------|
| . | Soft Frontal for Eclectic 70      | 08.0722.40 |
| . | Spot Lens for Eclectic 70         | 08.0711.00 |
| . | Medium Lens for Eclectic 70       | 08.0712.00 |
| . | Flood Lens for Eclectic 70        | 08.0713.00 |
| . | Cone Frontal for Eclectic 70      | 08.0721.14 |
| . | Cone Frontal for Eclectic 70      | 08.0721.40 |
| . | Soft Frontal for Eclectic 70      | 08.0722.14 |
| . | Flat Frontal for Eclectic 70      | 08.0723.14 |
| . | Flat Frontal for Eclectic 70      | 08.0723.40 |
| . | Module Fix for Eclectic 70        | 08.0739.00 |
| . | Module Adjustable for Eclectic 70 | 08.0740.00 |



08.0722.40

Soft Frontal for Eclectic 70



08.0711.00

Spot Lens for Eclectic 70



08.0712.00

Medium Lens for Eclectic 70



08.0713.00

Flood Lens for Eclectic 70



08.0721.14

Cone Frontal for Eclectic 70



08.0721.40

Cone Frontal for Eclectic 70



08.0722.14

Soft Frontal for Eclectic 70



08.0723.14

Flat Frontal for Eclectic 70



08.0723.40

Flat Frontal for Eclectic 70



08.0739.00

Module Fix for Eclectic 70



08.0740.00

Module Adjustable for Eclectic 70