

# FLOS

09.3803.18A Deep Brown

## Find Me 0


Designed by Jorge Herrera, 2019



Accent lighting LED module to be installed in the Zero Track system. Incorporated DC/DC electronic converter. Module non-dimmable. To individually control the lights, select integrated Casambi versions.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



### Main specifications

Mounting	Track
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Power LED
Number of lamps	1
Power (W)	3.5
Source flux (lm)	300
Lumen Output (lm)	179
Efficacy (lm/W)	52

### Physical

Colour	Deep Brown
Trim	No
Orientation	Adjustable
Rotation (°)	360
Longitudinal tilting (°)	90
Spot diameter (mm)	24
Net weight (kg)	0.06
IP internal	20

### Download

Mounting instructions [↓ PDF](#)

### Photometric Files

LDT / IES [↓ ZIP](#)

### Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)

[Bim](#) [↓ ZIP](#)



## Schematic light drawing



Beam Angle: 25°

h(m)	E(lx)	D(m)
1	929	0.45
2	232	0.89
3	103	1.34
4	58	1.79
5	37	2.23

Luminous flux luminaire  
179 lm

## Photometric


Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B50>50.000h (Tc=85°C)
Beam angle C0-180 (°)	25
Beam angle C90-270 (°)	25
Extreme cut off	No
UGR <sub>L</sub>	<10

## Electrical

Insulation class	III
Forward voltage (V)	24
LED current (mA)	250
Power supply	Remote excluded
Dimmable	No
Power supply type	Non Dimmable

## Ecodesign and Energy

### Labelling

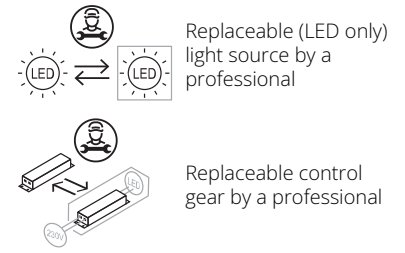

## Notes

Accessories included (honeycomb and screening crosspiece).