

FLOS


09.3781.30A9S White

Find Me 0 (Trim/No Trim)

Designed by Jorge Herrera, 2021



Hide-and-go-seek brought to light. The versatile Find Me is a tiny semi-recessed downlight hidden in the ceiling until otherwise sought. With a simple pull, the downlight can extend below the ceiling and transform into a refined cylindrical monopoint. This diminutive yet powerful luminaire is endlessly versatile and can tilt 90 degrees and rotate 360 degrees. Deep matte black snoot maximizes cut off and reduces glare. The Find Me line is available as a single with trim or without and as a pendant.

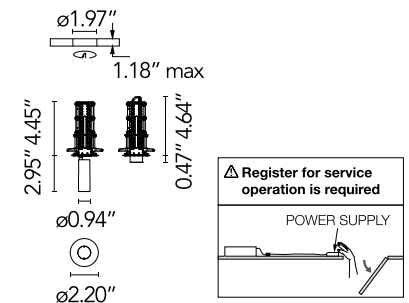

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

| | |
|------------------------|---------------------|
| Mounting | Ceiling recessed |
| Environments | Indoor dry location |
| Light Source Type | LED |
| Light sources included | Yes |
| LED type | Power LED |
| Lamp category | LED |
| Number of lamps | 1 |
| Power (W) | 2.8 |
| System flux (lm) | 170 |

Physical

| | |
|--------------------------|------------|
| Color | White |
| Orientation | Adjustable |
| Rotation (°) | 360 |
| Longitudinal tilting (°) | 90 |
| Recessed depth (in) | 5.32 |
| Net weight (lb) | 0.3 |
| Package volume (in) | 245 |
| IP internal | 20 |

Download

Family spec sheet [↓ ZIP](#)
Mounting instructions [↓ PDF](#)

Photometric Files


LDT / IES [↓ ZIP](#)

Ecodesign and Energy Labelling

 Replaceable (LED only) light source by a professional




Schematic light drawing



Beam Angle: 26°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1 | 786 | 0.45 |
| 2 | 197 | 0.91 |
| 3 | 87 | 1.36 |
| 4 | 49 | 1.82 |
| 5 | 31 | 2.27 |

Photometric

| | |
|------------------------|-----------|
| Lighting type | Direct |
| Light distribution | Symmetric |
| CCT (K) | 2700 |
| CRI> | 90 |
| Beam angle C0-180 (°) | 26 |
| Beam angle C90-270 (°) | 26 |
| UGR _L | <10 |


Electrical

| | |
|---------------------|-----------------|
| Insulation class | III |
| Forward voltage (V) | 12 |
| LED current (mA) | 250 |
| Driver | Remote excluded |
| Dimmable | Yes |

Notes

Integral LED is not field replaceable. IC-rated downlight for direct insulation contact. Fixture is constant Current Low Voltage LED, Class 2. Just 1 accessory can be install at the time. For filter options contact Flos. Wiring suitable for plenum spaces. Maximum remote distance is 50ft with 16ga. 3500K available, but not cataloged. Consult factory for additional color temperatures. Accessories included (honeycomb and screening crosspiece). Remote power supply to be installed in an accessible place. It is not recommended to use dimmable drivers of several brands due to the specific dimming curves of each brand. To use only one driver for various spots, connect the spots in series. Register for service operation is required.

Accessories & Power Supply



REQUIRED

Power supply

SP25W250MA-10V-A01

Splice Box with LED 25W 250mA

0-10V dimmable