

# FLOS


09.8405.DR Matte Anthracite

## Gustave Residential

Designed by Vincent Van Duysen, 2022



Gustave is a portable, self-powered luminaire, specially designed for tabletop lighting applications and other related uses as supplementary lighting. Gustave's compact size encloses a perfect mix of the most innovative optical and light technology and a disruptive engineering, developed in the service of a discretionary purpose of Flos for this project: to create the first portable luminaire on the market with circular design awareness, ecological and honestly conceived against obsolescence. Portable luminaire with autonomous battery, designed for residential applications. Powered by 'Button Type 18650 Li-Ion' batteries (2 units, included inside the product). USB-C charging cable (plug adapter not included). 0-100% sequential regulation by means of capacitive haptic push button.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

Mounting	Table
Light source type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	2.5
System power (W)	2.5
Source flux (lm)	221
Lumen Output (lm)	159
Efficacy (lm/W)	69

### Physical

Colour	Matte Anthracite
Length (mm)	155
Cord colour	White
Cord length (mm)	1200
Net weight (kg)	0.78
Package height (mm)	36
Package width (mm)	21
Package length (mm)	21
Package volume (m3)	0.02
IP internal	54

### Download

Mounting instructions [↓ PDF](#)

### Photometric Files

LDT / IES [↓ ZIP](#)


### Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)


### Ecodesign and Energy Labelling

 Replaceable (LED only) light source by a professional

 Replaceable control gear by an end-user



## Schematic light drawing



Beam Angle: 145°

h(m)	E(lx)	D(m)
1	22	6.28
2	6	12.56
3	2	18.84
4	1	25.11
5	1	31.39

Luminous flux luminaire  
159 lm

## Photometric

Lighting type	Direct
Light distribution	Roto symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
Rf fidelity index	93
Rg gamut index	100
Beam angle C0-180 (°)	144
Beam angle C90-270 (°)	144

## Electrical

Insulation class	III
LED current (mA)	180
Dimmable	Yes
Power supply type	Dimmable
Dimming interface	Dimmer Integrated
Plug type	Type A
Batteries inside	Yes
Battery type	LI-IO
Charging cycles guaranteed	500
Charging max power	1 A
Charging min time	5.5
Charging socket/connector	USB-C

## Notes

Product Battery autonomy: 100% - 6 hours / 50% - 10 hours / 25% - 18 hours.  
Batteries included. USB-A / USB-C Cable included. Adapter 5V, min 2A not included.

## Accessories & Power Supply




### REQUIRED

RF27576

Gaku Adapter 5V. Min 2A. EUR /  
USA / UK

## Spare Parts

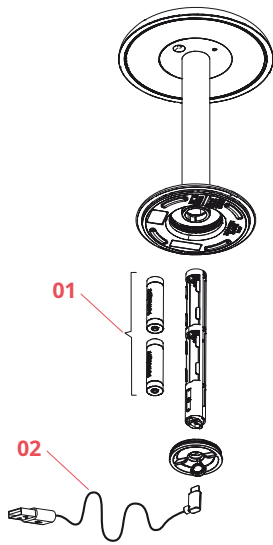

- |     |  |            |
|-----|--|------------|
| 02. | Cable for Gustave Residential<br>USB-A/USB-C | 08.0761.14 |
| 02. | Cable for Gustave Residential<br>USB-A/USB-C | 08.0761.30 |



### Cable

08.0761.14

Cable for Gustave Residential  
USB-A/USB-C



### Cable

08.0761.30

Cable for Gustave Residential  
USB-A/USB-C