


# FLOS



FA51201312 Forest Green

## Heavy Metal Wall 3 Double

Designed by FLOS Outdoor

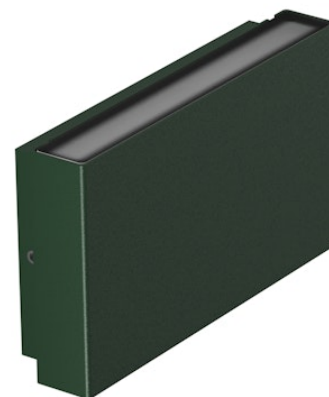


4W - 336lm - 3000K - CRI> 80 - Beam° 80

LED source included. Electric remote 24V dc ON/OFF power supply to be ordered separately. Wall fixing bracket included. The luminaire is equipped with a protruding neoprene, 250 mm cable and a wiring kit with crimp connectors and adhesive heat-shrink tubing guaranteeing the water tightness of the connection. Extra clear transparent glass.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



### Main specifications

|                   |               |
|-------------------|---------------|
| EAN               | 8054793629056 |
| Mounting          | Wall          |
| LED type          | Power LED     |
| Power (W)         | 4             |
| System power (W)  | 5             |
| Source flux (lm)  | 530           |
| Lumen Output (lm) | 336           |

### Physical

|                     |              |
|---------------------|--------------|
| Colour              | Forest Green |
| Orientation         | Fixed        |
| Net weight (kg)     | 0.61         |
| Package height (mm) | 134          |
| Package width (mm)  | 134          |
| Package length (mm) | 83           |
| IP internal         | 65           |

### Download

Mounting instructions [ZIP](#)

### Photometric Files

LDT / IES [ZIP](#)

### Technical Drawings

2D [ZIP](#)


3D [ZIP](#)



### Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F

Schematic light drawing



Photometric

|                                 |           |
|---------------------------------|-----------|
| Lighting type                   | Direct    |
| Light distribution              | Symmetric |
| CCT (K)                         | 3000      |
| CRI>                            | 80        |
| Beam angle C0-180 (°)           | 80        |
| Beam angle C90-270 (°)          | 90        |
| Beam angle indirect C0-180 (°)  | 80        |
| Beam angle indirect C90-270 (°) | 90        |
| Extreme cut off                 | No        |

Electrical

|                    |                 |
|--------------------|-----------------|
| Insulation class   | III             |
| Main voltage (Vac) | 24              |
| Power supply       | Remote excluded |
| Power supply type  | Dimmable        |
| Emergency          | No              |

Accessories & Power Supply



REQUIRED  
Accessory

F990H010000  
Recessed 3-module junction box  
(model 503)



REQUIRED  
Power supply

F990B21A000  
Power supply 17W/110÷240V  
-24Vdc (15W@110V) IP67 Class II  
Selv. Dimmable Push-Dimm Or  
1.10V



REQUIRED  
Power supply

F990B28A000  
Power supply 24Vdc 50W / 220-  
240V IP67 Class I selv. Non  
Dimmable



REQUIRED  
F990B34A000

Power Supply dual function C.V.  
Vout 24Vdc 8W, Vin 220÷240V  
C.C. Iout 350mA: 8W, Vin  
220÷240V IP 20 Class II Selv. NON  
Dimmable



REQUIRED  
Power supply

RF25757  
Power supply 24V 10W / 110-  
240V IP67 Class II selv.\_Non  
Dimmable



REQUIRED  
Power supply

RF25752  
Power supply 24Vdc 20W / 220-  
240V IP67 Class II selv. Non  
Dimmable



REQUIRED  
Power supply

RF25747  
Power supply 24V 10W /110-240V  
IP20 Class II selv. Non Dimmable



REQUIRED  
Power supply

RF25750  
Power supply 24Vdc 17W / 110-  
240V (15W@110V) IP20 Class II  
selv. Dimmable Push-Dimm Or  
1.10V



REQUIRED  
Power supply

RF25748

Power Supply dual function C.V.  
Vout 24Vdc 8W, Vin 220÷240V  
C.C. Iout 350mA: 8W, Vin  
220÷240V IP 65 Class II Selv. NON  
Dimmable



REQUIRED  
Power supply

F990B27A000

Power supply 24Vdc 70W / 220-  
240V IP67 Class I selv. Non  
Dimmable