


FLOS



FA51201512 Forest Green

Heavy Metal Wall 3 Double

Designed by FLOS Outdoor, 2011

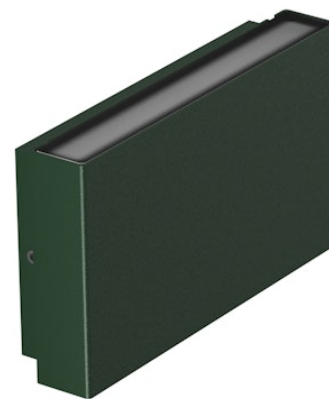


4W - 324lm - 2700K - CRI> 80 - Beam° 80

LED source included. Electric remote 24V dc ON/OFF power supply to be ordered separately. Wall fixing bracket included. The luminaire is equipped with a protruding, neoprene, 250 mm cable and a wiring kit with crimp connectors and adhesive heat-shrink tubing guaranteeing the water tightness of the connection. Extra clear transparent glass.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

EAN	8054793629117
Mounting	Wall
Light source type	LED
Light sources included	Yes
LED type	Power LED
Number of lamps	1
Power (W)	4
System power (W)	5
Source flux (lm)	492
Lumen Output (lm)	324

Physical

Colour	Forest Green
Orientation	Fixed
Net weight (kg)	0.61
Package height (mm)	134
Package width (mm)	134
Package length (mm)	83
IP internal	65

Download

Mounting instructions [ZIP](#)

Photometric Files

LDT / IES [ZIP](#)

Technical Drawings

2D [ZIP](#)

3D [ZIP](#)



IP	IK
65	03


Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Non-replaceable light source

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	80
Beam angle C0-180 (°)	80
Beam angle C90-270 (°)	90
Beam angle indirect C0-180 (°)	80
Beam angle indirect C90-270 (°)	90
Extreme cut off	No

Electrical

Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	24
Power supply	Remote excluded
Dimmable	Yes
Power supply type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)
Emergency	No

Accessories & Power Supply



REQUIRED
Accessory

F990H010000
Recessed 3-module junction box
(model 503)



REQUIRED
Power supply
F990B21A000
Power supply 17W/110÷240V
-24Vdc (15W@110V) IP67 Class II
Selv. Dimmable Push-Dimm Or
1.10V



REQUIRED
Power supply
F990B28A000
Power supply 24Vdc 50W / 220-
240V IP67 Class I selv. Non
Dimmable



REQUIRED
F990B34A000
Power Supply dual function C.V.
Vout 24Vdc 8W, Vin 220÷240V
C.C. Iout 350mA: 8W, Vin
220÷240V IP 20 Class II Selv. NON
Dimmable



REQUIRED
Power supply
RF25757
Power supply 24V 10W / 110-
240V IP67 Class II selv._Non
Dimmable



REQUIRED
Power supply
RF25752
Power supply 24Vdc 20W / 220-
240V IP67 Class II selv. Non
Dimmable



REQUIRED
Power supply
RF25747
Power supply 24V 10W /110-240V
IP20 Class II selv. Non Dimmable



REQUIRED
Power supply
RF25750
Power supply 24Vdc 17W / 110-
240V (15W@110V) IP20 Class II
selv. Dimmable Push-Dimm Or
1.10V



REQUIRED
Power supply

RF25748

Power Supply dual function C.V.
Vout 24Vdc 8W, Vin 220÷240V
C.C. Iout 350mA: 8W, Vin
220÷240V IP 65 Class II Selv. NON
Dimmable



REQUIRED
Power supply

F990B27A000

Power supply 24Vdc 70W / 220-
240V IP67 Class I selv. Non
Dimmable