

# FLOS



FA51200333 Anthracite

## Heavy Metal Wall 3 Mono

Designed by FLOS Outdoor

2W - 168lm - 3000K - CRI> 80 - Beam° 80

LED source included. Electric remote 24V dc ON/OFF power supply to be ordered separately. Wall fixing bracket included. The luminaire is equipped with a protruding, neoprene, 250 mm cable and a wiring kit with crimp connectors and adhesive heat-shrink tubing guaranteeing the water tightness of the connection. Extra clear transparent glass.

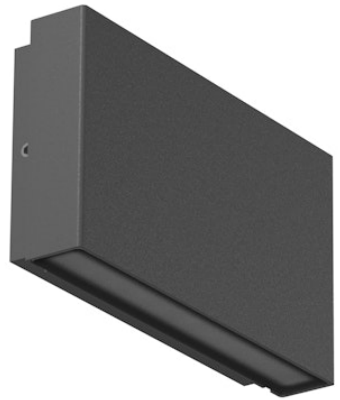

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

EAN	8054793628837
Mounting	Wall
Environments	Outdoor wet location
LED type	Power LED
Power (W)	2
System power (W)	2.5
Source flux (lm)	265
Lumen Output (lm)	168

### Physical

Colour	Anthracite
Orientation	Fixed
Net weight (kg)	0.61
Package height (mm)	134
Package width (mm)	134
Package length (mm)	83
IP internal	65

### Download

[Mounting instructions](#)  ZIP

### Photometric Files

[LDT / IES](#)  ZIP

### Technical Drawings

[2D](#)  ZIP


[3D](#)  ZIP



### Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F

## Schematic light drawing



h(m)	E(lx)	D(m)
1	87	1.62
2	22	3.24
3	10	4.87
4	5	6.49
5	3	8.11

## Photometric

Light distribution	Symmetric
CCT (K)	3000
CRI>	80
Beam angle C0-180 (°)	80
Beam angle C90-270 (°)	90
Extreme cut off	No

## Electrical

Insulation class	III
Main voltage (Vac)	24
Power supply	Remote excluded
Power supply type	Dimmable
Emergency	No

## Accessories & Power Supply



REQUIRED  
Power supply

RF25750

Power supply 24Vdc 17W / 110-240V (15W@110V) IP20 Class II selv. Dimmable Push-Dimm Or 1.10V



REQUIRED  
Power supply

RF25757

Power supply 24V 10W / 110-240V IP67 Class II selv.\_Non Dimmable



REQUIRED  
Power supply

RF25752

Power supply 24Vdc 20W / 220-240V IP67 Class II selv. Non Dimmable



REQUIRED  
Power supply

RF25747

Power supply 24V 10W /110-240V IP20 Class II selv. Non Dimmable



REQUIRED  
Power supply

RF25748

Power Supply dual function C.V. Vout 24Vdc 8W, Vin 220÷240V C.C. Iout 350mA: 8W, Vin 220÷240V IP 65 Class II Selv. NON Dimmable



REQUIRED  
Accessory

F990H010000

Recessed 3-module junction box (model 503)



REQUIRED  
Power supply

F990B21A000

Power supply 17W/110÷240V -24Vdc (15W@110V) IP67 Class II Selv. Dimmable Push-Dimm Or 1.10V



REQUIRED

F990B34A000

Power Supply dual function C.V. Vout 24Vdc 8W, Vin 220÷240V C.C. Iout 350mA: 8W, Vin 220÷240V IP 20 Class II Selv. NON Dimmable



REQUIRED  
Power supply

F990B23AZ00

Power supply 24Vdc 35W /120-270V IP67 Class II selv.



REQUIRED  
Power supply

F990B27A000

Power supply 24Vdc 70W / 220-240V IP67 Class I selv. Non Dimmable



REQUIRED  
Power supply

F990B28A000

Power supply 24Vdc 50W / 220-240V IP67 Class I selv. Non Dimmable



REQUIRED  
Power supply

F990B29A000

Power supply 24Vdc 100W / 220-240V IP67 Class I selv. Non Dimmable