



In-Finity 70 Suspension Down Emergency 4000K  
Micro-Prismatic Diffuser Dali

Designed by FLOS Architectural

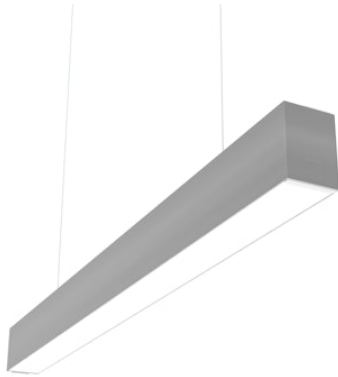

LED modular system for suspended installation, including LED luminaires, aluminum installation profile, and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules. Suspension kit not included.



Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Suspension          |
| Environments           | Indoor dry location |
| Light source type      | LED                 |
| Light sources included | Yes                 |
| LED type               | Top LED             |
| Lamp category          | LED                 |
| Power (W)              | 32                  |

### Physical

|             |               |
|-------------|---------------|
| Colour      | Anodized Grey |
| Trim        | No            |
| Orientation | Fixed         |
| Length (mm) | 1400          |
| IP internal | 20            |
| IP external | 20            |

Download

Mounting instructions

 ZIP



Photometric

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| Light distribution     | Symmetric |
| CCT (K)                | 4000      |
| CRI>                   | 80        |
| Beam angle C0-180 (°)  | 72        |
| Beam angle C90-270 (°) | 72        |

Electrical

|                   |                 |
|-------------------|-----------------|
| Insulation class  | I               |
| Power supply      | Integrated      |
| Dimmable          | Yes             |
| Power supply type | Dimmable DALI 1 |
| Emergency         | No              |

Notes

Micro-Prismatic Diffuser: Highly efficient multilayer diffuser that, thanks to its unique micro-prismatic texture, provides a glare free UGR<19 light beam. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.



Accessories & Power Supply



REQUIRED  
Accessory

08.0030

Suspension kit



REQUIRED  
Accessory

08.0031.00.DA

Power supply rose. Dali



OPTIONAL  
Accessory

08.0113.00

500 mm micro-prismatic diffuser.  
Highly efficient multilayer diffuser  
that, thanks to its unique  
microprismatic texture, provides  
a glare free UGR<19 light beam