


# FLOS

N70UEM3U02B Anodized Grey

## In-Finity 70 Suspension Up & Down Emergency 3000K Micro-Prismatic Diffuser

Designed by FLOS Architectural

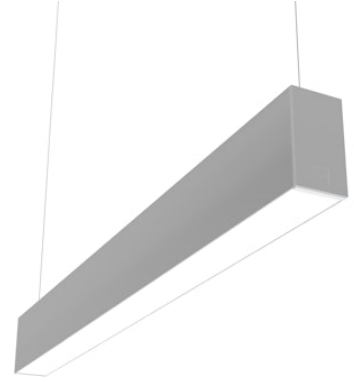

LED modular system for suspended installation, including LED luminaires, aluminum installation profile, and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules. Suspension kit included.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Power (W)	50

### Physical

Colour	Anodized Grey
Trim	No
Orientation	Fixed
Length (mm)	1400
IP internal	20
IP external	20

### Download

[Mounting instructions](#)

[PDF](#)



## Photometric

Lighting type	Direct, Indirect
Light distribution	Symmetric
CCT (K)	3000
CRI>	80
Beam angle C0-180 (°)	72
Beam angle C90-270 (°)	72

## Electrical

Insulation class	I
Power supply	Integrated
Dimmable	No
Power supply type	Non Dimmable
Emergency	No

## Notes

Micro-Prismatic Diffuser: Highly efficient multilayer diffuser that, thanks to its unique micro-prismatic texture, provides a glare free UGR<19 light beam. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

---

## Accessories & Power Supply



REQUIRED  
Accessory

08.0030

Suspension kit



REQUIRED  
Accessory

08.9057.02

Metal cover. Suspension Up & Down. 70 mm (Colour Anodized Grey)



REQUIRED  
Accessory

08.9057.40

Metal cover. Suspension Up & Down. 70 mm (Colour White)



REQUIRED  
Accessory

08.9057.NS

Metal cover. Suspension Up & Down. 70 mm (Colour Black)



REQUIRED  
Accessory

08.0031.00

Power supply rose



OPTIONAL  
Accessory

08.0110.00

500 mm opal diffuser. Diffuse, glare free and uniform lighting throughout the room