

FLOS

 F017C1BA033 Anthracite

Ingraze Fixed Frame L 900

Designed by FLOS Outdoor, 2023




2209lm - 2200K - CRI> 80 - Beam° 25

High-power LED source included and rear lenses. 1-10V or DALI on-off and dimmable 220-240V power supply. Compulsory installation box to be ordered separately. Pre-wired with H2O Stop quick connectors, lug/socket included. ACT (Anti-Corrosion Treatment) upon request.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

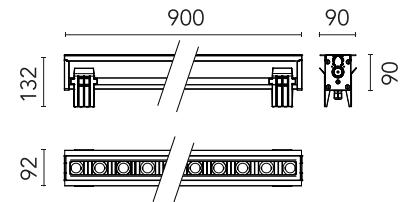

Main specifications

EAN	8054793269467
Mounting	In-ground
Environments	Outdoor wet location
LED type	Power LED
System power (W)	26
Lumen Output (lm)	2209

Physical

Colour	Anthracite
Orientation	Fixed
Length (mm)	900
Net weight (kg)	5.13
Package height (mm)	230
Package width (mm)	170
Package length (mm)	972
Package volume (m3)	0.04
IP internal	66
IP external	67
Static load (kg)	2500.000

Drive Over Yes



Download

Mounting instructions [ZIP](#)



Photometric Files

LDT / IES



Technical Drawings

2D



3D



Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Schematic light drawing



Beam Angle: 25°		
h(m)	E(lx)	D(m)
1	9837	0.44
2	2459	0.88
3	1093	1.32
4	615	1.76
5	393	2.20

Photometric

Lighting type	Direct
Light distribution	Roto symmetric
CCT (K)	2200
CRI>	80
Beam angle C0-180 (°)	25
Beam angle C90-270 (°)	25

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Power supply	Integrated
Power supply type	Non Dimmable

Accessories & Power Supply



REQUIRED Frame

Installation

F017Z030000

Framed installation box for single flush installations L 900



REQUIRED Accessory

Electrical

F990C082000

5-pin connector kit with detachable socket + EU plug.



REQUIRED Frame

Installation

F017Z130000

Framed/frameless installation box for single installations L 900



REQUIRED Accessory

Electrical

F990C083000

4-pin connector kit with detachable socket + EU plug.



OPTIONAL Accessory

F990C010000

3/4 way terminal block 4 poles IP68 H2O stop. (ø5,5÷12mm cable)

OPTIONAL Accessory

F990C030000

4 way junction box 5 poles IP68 (6-14 mm cables)

OPTIONAL Frame

Installation

F017Z730000

Framed/frameless anti-theft installation box for single installations L 900

OPTIONAL Accessory

F990C00A000

2 way terminal block 4 poles IP68 H2O stop. (ø5,5÷12mm cable)



OPTIONAL
Accessory

F990C080000
Connector kit 5-pole flying socket
+ EU plug IP68.



OPTIONAL
Accessory

F990C081000
Electrical
4-pin connector kit with
detachable socket + IP68 EU plug.



OPTIONAL
Frame

F017Z560033
Installation
Frameless anti-theft bracket kit.



OPTIONAL
Frame

F017Z630000
Installation
Complete framed anti-theft
installation box for single flush
installations L 900



OPTIONAL
Frame
Installation

F017Z230000
Framed flush continuous line
module L 900



OPTIONAL
Frame
Installation

F017Z231000
Framed/frameless continuous
line module L 900



OPTIONAL
Frame
Installation

F017Z550033
Framed anti-theft bracket kit.



OPTIONAL
Frame
Installation

F017Z490000
Standard end-plate cover kit.



OPTIONAL
Frame
Installation

F017Z530000

Standard connecting plate kit.



OPTIONAL
Frame
Installation

F017Z560006

Frameless anti-theft bracket kit.



OPTIONAL
Frame
Installation

F017Z550006

Framed anti-theft bracket kit.



OPTIONAL
Frame
Installation

F017Z531000

Anti-theft connecting plate kit.