

FLOS

08.8595.05B9S Polished Silver

Junco 250 mm

LED - Power LED - 2.2W - 148lm - 2700K - CRI> 90 - Beam° 15



Luminaire that offers many possibilities. Can be individually focused and their recessed height is adjustable.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
LED type	Power LED
Lamp category	LED
Power (W)	2.2
System power (W)	4.1
Source flux (lm)	220
System flux (lm)	148
Efficacy (lm/W)	37

Physical

Color	Polished Silver
Trim	No
Orientation	Adjustable
Rotation (°)	360
Longitudinal tilting (°)	20
Recessed depth (in)	8.26
IP internal	20

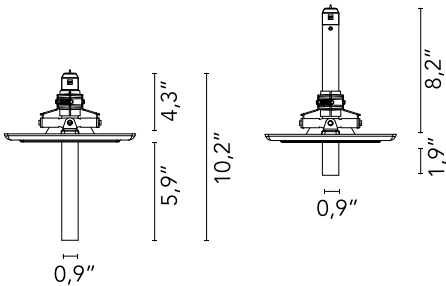

Download

- Family spec sheet [ZIP](#)
- Mounting instructions [PDF](#)

Photometric Files


- LDT / IES [ZIP](#)

Technical Drawings

- 2D [ZIP](#)
- 3D [ZIP](#)



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
Beam angle C0-180 (°)	15
Beam angle C90-270 (°)	15
Extreme cut off	No
UGRL	<10


Electrical

Forward voltage (V)	3
LED current (mA)	700
Driver	Remote excluded
Dimmable	Yes
Dimming type	Non Dimmable, Dimmable 1-10V

Notes

Soft Plate to be order separately.

Accessories & Power Supply



OPTIONAL
Power supply

ACCESSORYTYPE1

SP40W700MA-10V-A02

Splice Box UL 700mA , 40W, 0-10V Dimmable, 120-277V

OPTIONAL
Power supply

ACCESSORYTYPE1

SP25W700MA-10V-A02

Splice Box UL 700mA , 25W, 0-10V Dimmable, 120-277V