

Junco 250 mm

LED - Power LED - 2.2W - 148lm - 2700K - CRI> 90 - Beam° 15



Luminaire that offers many possibilities. Can be individually focused and their recessed height is adjustable.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
LED type	Power LED
Lamp category	LED
Power (W)	2.2
System power (W)	4.1
Source flux (lm)	220
Lumen Output (lm)	148
Efficacy (lm/W)	37

Physical

Colour	Polished Silver
Trim	No
Orientation	Adjustable
Rotation (°)	360
Longitudinal tilting (°)	20
Recessed depth (mm)	210
Length (mm)	250
Net weight (kg)	0.13
IP internal	20

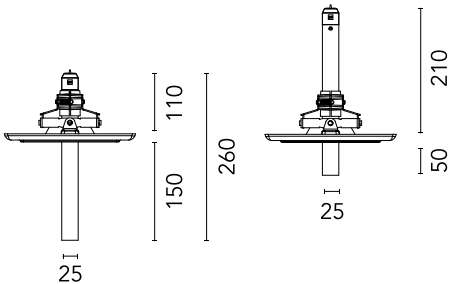

Download

Mounting instructions [Download PDF](#)


Photometric Files

LDT / IES [Download ZIP](#)


Technical Drawings

2D [Download ZIP](#)

3D [Download ZIP](#)



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
Beam angle C0-180 (°)	15
Beam angle C90-270 (°)	15
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	3
LED current (mA)	700
Power supply	Remote excluded
Dimmable	Yes
Power supply type	Non Dimmable, Dimmable 1-10V, Dimmable Push
Emergency	No

Notes

Soft Plate to be order separately.

Accessories & Power Supply



OPTIONAL
Power supply

ACCESSORYTYPE1

60.8911

Non dimmable continuous current power supply of 15-20W, 110/240V - 50/60Hz, with power current selected through adjustable 350 mA-15W /500 mA /550 / 700 / 850 mA / 900 mA - 20W switch



OPTIONAL
Power supply

ACCESSORYTYPE1

60.9188

Continuous current power supply of 13-20W, 110*/240V - 50/60Hz with current selected through adjustable 200 mA - 13W / 300 mA - 15W / 350 mA - 18W / 400 / 450 / 500 / 550 / 600 / 650 / 700 / 750 / 800 / 850 / 900 mA - 20W. switch. 0/1-10V or push.



OPTIONAL
Power supply

ACCESSORYTYPE1

60.9222

Continuous current power supply of 12-20W, 110/240V - 50/60Hz with power current selected through adjustable 250mA - 12W / 350mA - 17W / 400mA - 19W / 450 / 500/ 550 / 600 / 700mA - 20W regulable Dali 1 & Dali 2



OPTIONAL
Power supply

ACCESSORYTYPE1

60.9592

Non dimmable continuous current power supply. 15-30W, 220/240V -50/60Hz with power current selected through adjustable switch. 350mA - 15W / 400mA - 17W / 450mA - 19W / 500mA - 22W / 550mA - 24W / 600mA - 26W / 650mA - 28W / 700mA - 30W.



OPTIONAL
Power supply

ACCESSORYTYPE1

60.9692

30W, 220-240V - 50/60Hz
Constant current power supply, with dip-switch programmable power supply current.



OPTIONAL
Power supply

ACCESSORYTYPE1

60.9379

Mains Dimming, continuous current power supply 10W, 220/240V - 50/60Hz



OPTIONAL
Power supply

ACCESSORYTYPE1

60.9408

No dim continuous current power supply 13-20W, 220/240V - 50/60Hz



OPTIONAL
Power supply

ACCESSORYTYPE1

60.7785

Constant current power supply 42W, 220-240V CASAMBI dimmable.