

# FLOS

08.8591.AAB9S Black

## Junco 400 mm

LED - Power LED - 2.2W - 193lm - 3000K - CRI> 90 - Beam° 15



Luminaire that offers many possibilities. Can be individually focused and their recessed height is adjustable.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

### Main specifications

|                  |                     |
|------------------|---------------------|
| Mounting         | Ceiling recessed    |
| Environments     | Indoor dry location |
| LED type         | Power LED           |
| Lamp category    | LED                 |
| Power (W)        | 2.2                 |
| System power (W) | 4.1                 |
| Source flux (lm) | 257                 |
| System flux (lm) | 193                 |
| Efficacy (lm/W)  | 48                  |

### Physical

|                          |            |
|--------------------------|------------|
| Color                    | Black      |
| Trim                     | No         |
| Orientation              | Adjustable |
| Rotation (°)             | 360        |
| Longitudinal tilting (°) | 20         |
| Recessed depth (in)      | 14.8       |
| IP internal              | 20         |

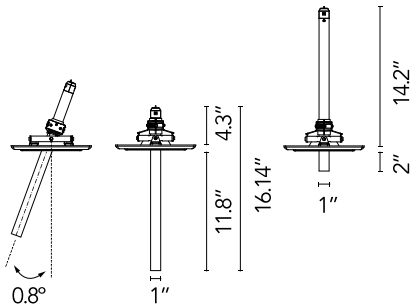

### Download

- Family spec sheet [ZIP](#)
- Mounting instructions [PDF](#)

### Photometric Files


- LDT / IES [ZIP](#)

### Technical Drawings

- 2D [ZIP](#)
- 3D [ZIP](#)



Schematic light drawing



Photometric

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| Light distribution     | Symmetric |
| CCT (K)                | 3000      |
| CRI>                   | 90        |
| Beam angle C0-180 (°)  | 15        |
| Beam angle C90-270 (°) | 15        |
| Extreme cut off        | No        |
| UGRL                   | <10       |


Electrical

|                     |                                 |
|---------------------|---------------------------------|
| Forward voltage (V) | 3                               |
| LED current (mA)    | 700                             |
| Driver              | Remote excluded                 |
| Dimmable            | Yes                             |
| Dimming type        | Non Dimmable,<br>Dimmable 1-10V |

Notes

Soft Plate to be order separately.

Accessories & Power Supply




OPTIONAL  
Power supply

ACCESSORYTYPE1

SP40W700MA-10V-A02

Splice Box UL 700mA , 40W, 0-10V Dimmable, 120-277V



OPTIONAL  
Power supply

ACCESSORYTYPE1

SP25W700MA-10V-A02

Splice Box UL 700mA , 25W, 0-10V Dimmable, 120-277V