

FLOS

F3311033 Anthracite


Kelvin Led Base

Designed by Antonio Citterio/assistant Toan Nguyen, 2009

8W - 285lm - 3000K



Adjustable table lamp providing direct lighting, with double pantograph arm and adjustable head. Fused aluminum alloy body. Die-cast aluminum outer head, with injection-molded methacrylate diffuser. BASE external cover in ABS. Extruded aluminum alloy square tube (12x12mm) structure, machined mechanically, so that it houses a stainless steel load-compensation spring and injection-molded acetal resin sliding blocks. 3 mm diameter wire outer tie rods. Available in white, anthracite, black or chrome finishes. The ON/OFF switch is electronic with optical mechanism located in the head. Two possibilities to choose: - PERSONAL MODE (orange switch) Dimm the light intensity you like. - GREEN MODE (green switch) Now Kelvin LED becomes Green, saving even more energy thanks to his automatic compensation of the ambience light.

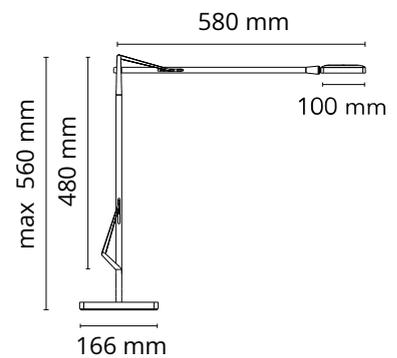

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

| | |
|------------------------|---------------------|
| Mounting | Table |
| Environments | Indoor dry location |
| Light source type | LED |
| Light sources included | Yes |
| LED type | LED Module |
| Power (W) | 8 |
| Lumen Output (lm) | 285 |

Physical

| | |
|---------------------|------------|
| Colour | Anthracite |
| Length (mm) | 581 |
| Cord colour | Black |
| Cord length (mm) | 1800 |
| Net weight (kg) | 3.9 |
| Package volume (m3) | 0.02 |
| IP internal | 20 |

Download

- [Mounting instructions](#) PDF
- [Mounting instructions](#) PDF
- [Mounting instructions](#) PDF

Photometric Files


- [LDT / IES](#) LDT

Technical Drawings

- [2D](#) ZIP
- [3D](#) ZIP



Schematic light drawing



Photometric

| | |
|--------------------|-----------|
| Lighting type | Direct |
| Light distribution | Symmetric |
| CCT (K) | 3000 |
| Extreme cut off | No |

Electrical


| | |
|--------------------|------------------------|
| Insulation class | III |
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 100-240 |
| Power supply | Remote included |
| Dimmable | Yes |
| Power supply type | Electronic 24V |
| Dimming interface | Dimmer Integrated |
| Plug type | Type A, Type C, Type G |
| Batteries inside | No |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Spare Parts

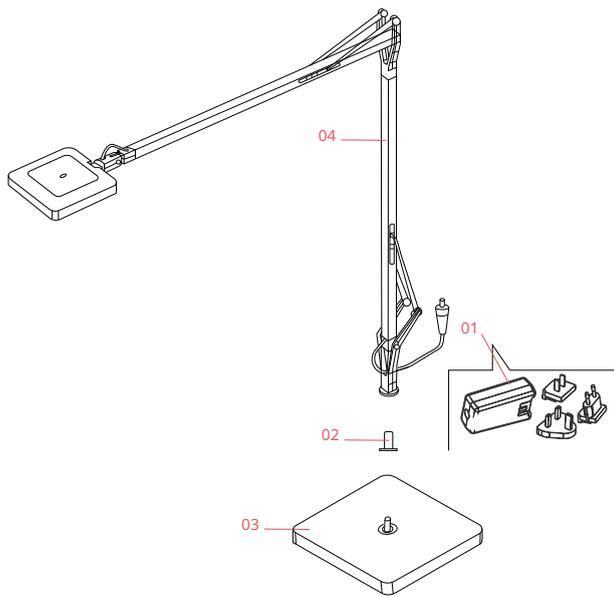

- | | | |
|-----|---------------------------------------|-----------|
| 01. | Black plug assembly kit & 24V driver | RF6600230 |
| 02. | Kelvin Led Black insert for lamp base | RF18764 |
| 03. | Kelvin led gm anthracite base | F3322033A |
| 04. | Kelvin led gm anthracite body | F3312033 |



RF6600230
Black plug assembly kit & 24V driver



RF18764
Kelvin Led Black insert for lamp base



F3322033A
Kelvin led gm anthracite base



F3312033
Kelvin led gm anthracite body