

# FLOS

F3694056 Polished Inox

## Last Order Fluted


Designed by Michael Anastassiades, 2020

3W - 87lm - 2700K - CRI> 90

Last Order is a continuation of the table light that was originally designed for the new Four Seasons restaurant in New York City, which relocated and opened in 2018 with the interiors designed by S&tilde;o Paolo-based architect Isay Weinfeld. It is a rechargeable, portable table lamp that diffuses light through a transparent solid crystal base whose shape makes reference to architectural typology of the ancient column. The top cover comes in a combination of different metal and color finishes: stainless steel, brass, satin copper or matte green. Features Indoor use only: Copper & Brass Outdoor and indoor use: Stainless Steel & Matte Green Autonomous usage lasts between 6 hours (at full power) and 24 hours Charges via USB-C 3-step dimmer : 100% intensity, 50% intensity, 3% intensity "Night shift" mode - Dims directly to 3% intensity when pressing and holding the optical sensor.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

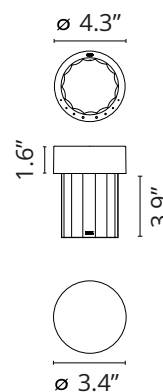

### Main specifications

|                        |                     |
|------------------------|---------------------|
| EAN                    | 8059607030516       |
| Mounting               | Portable            |
| Environments           | Indoor wet location |
| Light Source Type      | LED                 |
| Light sources included | Yes                 |
| LED type               | LED Module          |
| Power (W)              | 3                   |
| System flux (lm)       | 87                  |

### Physical

|                     |               |
|---------------------|---------------|
| Color               | Polished Inox |
| Length (in)         | 4.41          |
| Net weight (lb)     | 4.49          |
| Gross weight (lb)   | 6.23          |
| Package volume (in) | 540.67        |
| IP internal         | 55            |

### Download

Mounting instructions [Download PDF](#)

Dimmers or chargers compatible [Download PDF](#)

### Photometric Files

LDT / IES [Download LDT](#)

### Technical Drawings

3D [Download ZIP](#)



Schematic light drawing



Photometric


|                    |                |
|--------------------|----------------|
| Lighting type      | Direct         |
| Light distribution | Roto symmetric |
| CCT (K)            | 2700           |
| CRI>               | 90             |
| Extreme cut off    | No             |

Electrical


|                           |                        |
|---------------------------|------------------------|
| Insulation class          | III                    |
| Frequency (Hz)            | 50/60                  |
| Main voltage (Vac)        | 100-240                |
| Driver                    | Remote included        |
| Dimmable                  | Yes                    |
| Dimming type              | Electronic 5V          |
| Dimming interface         | Dimmer Integrated      |
| Plug type                 | Type A, Type C, Type G |
| Batteries inside          | Yes                    |
| Battery type              | LI-PO                  |
| Charging socket/connector | USB-C                  |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user

Spare Parts



- |     |                                     |          |
|-----|-------------------------------------|----------|
| 01. | Last Order Cover in Stainless Steel | F3692056 |
| 02. | Last Order Led body assembly        | RF36267  |
| 03. | Last Order Crystal fluted base      | RF29125  |



F3692056

Last Order Cover in Stainless  
Steel



RF36267

Last Order Led body assembly



RF29125

Last Order Crystal fluted base