

Light Shadow 2 Spots Adjustable Trim-Trimsless, Airtight Housing for New construction, Integral 0-10V dimmable driver. CCEA Chicago Plenum

Light Shadow 2L Adjustable Airtight Housing for New construction, Integral 0-10V dimmable driver. CCEA Chicago Plenum



Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Environments	Indoor dry location
Power (W)	7

Physical

Length (in)	11.9
Net weight (lb)	9.93
Gross weight (lb)	12.57

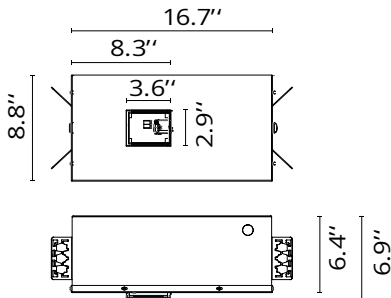

Download

Mounting instructions



Electrical

Frequency (Hz)	50/60
Main voltage (Vac)	120-277
LED current (mA)	900
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V
Dimming range (%)	20-100%