


Light Shadow Adjustable No Trim 2 Spots Optic Medium - Airtight IC Rated

Designed by FLOS Architectural, 0

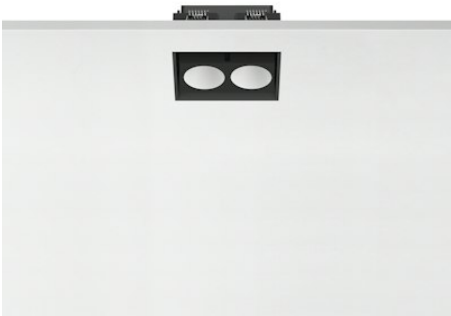

LED - Power LED - 7W - 448lm - 2700K - CRI> 90 - Beam° 22

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	7
Source flux (lm)	540
System flux (lm)	448

Physical

Color	Black/White
Trim	No
Orientation	Adjustable
Longitudinal tilting (°)	30
Net weight (lb)	0.56
IP internal	20



GWT
850°

Download

Family spec sheet

ZIP

Mounting instructions

PDF

Photometric Files

LDT / IES

ZIP

Technical Drawings


2D

ZIP

3D

ZIP

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	22
UGRL	5

Electrical

Insulation class	III
Forward voltage (V)	7
LED current (mA)	900
Driver	Remote

Notes

It requires a pre-installation frame, to be ordered separately.

Accessories & Power Supply



REQUIRED
Housing and Hanger Bar

08.1201.00.UL

Bar Hanger Set , Male-Female (set of 2)



REQUIRED
Housing and Hanger Bar

08.7064.00A90

Light Shadow 2 Spots Adjustable Trim-Trimsless, Airtight Housing for New construction, Integral 0-10V dimmable driver. CCEA Chicago Plenum