


Light Shadow Adjustable No Trim 2 Spots Optic Spot - Airtight IC Rated

Designed by FLOS Architectural, 2022

LED - Power LED - 7W - 566lm - 3000K - CRI> 90 - Beam° 12

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply.

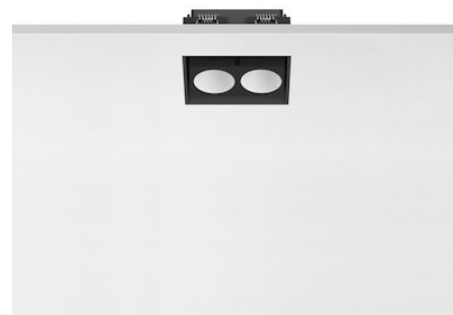

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	7
System power (W)	7
Source flux (lm)	636
System flux (lm)	566
Efficacy (lm/W)	80

Physical

Color	Black/White
Trim	No
Orientation	Adjustable
Longitudinal tilting (°)	30
Net weight (lb)	0.56
Gross weight (lb)	0.67
IP internal	20



Download

- Family spec sheet [ZIP](#)
- Mounting instructions [PDF](#)

Photometric Files


- LDT / IES [ZIP](#)

Technical Drawings

- 2D [ZIP](#)
- 3D [ZIP](#)



Schematic light drawing



Ecodesign and Energy Labelling



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B10 > 50.000h
Beam angle C0-180 (°)	12
Beam angle C90-270 (°)	12
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	7
LED current (mA)	900
Driver	Remote
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

It requires a pre-installation frame, to be ordered separately.

<https://professional.flos.com/en-US/us/product/light-shadow-adjustable-no-trim-2-spots-optic-spot-airtight-ic-rated-03.8920.14c90/>

03.8920.14C90

©2026 Flos - P.IVA 00290820174 - 9/18/2026

professional.flos.com | info@flos.com 2/3

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order to improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

Accessories & Power Supply



REQUIRED
Housing and Hanger Bar

08.1201.00.UL

Bar Hanger Set , Male-Female (set of 2)



REQUIRED
Housing and Hanger Bar

08.7064.00A90

Light Shadow 2 Spots Adjustable Trim-Trimsless, Airtight Housing for New construction, Integral 0-10V dimmable driver. CCEA Chicago Plenum