


## Light Shadow Adjustable Trim Dali Version 12 Spots Optic Spot

Designed by FLOS Architectural, 2022

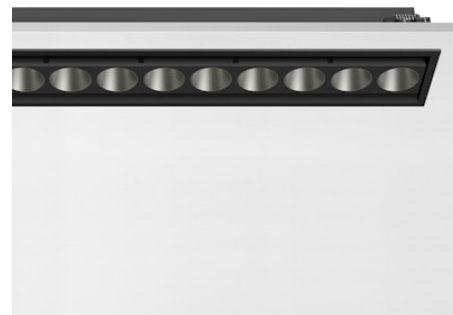

LED - Power LED - 32.4W - 3130lm - 2700K - CRI> 90 - Beam° 11

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Ceiling recessed    |
| Environments           | Indoor dry location |
| Light source type      | LED                 |
| Light sources included | Yes                 |
| LED type               | Power LED           |
| Lamp category          | LED                 |
| Number of lamps        | 1                   |
| Power (W)              | 32.4                |
| System power (W)       | 32.4                |
| Source flux (lm)       | 3576                |
| Lumen Output (lm)      | 3130                |
| Efficacy (lm/W)        | 96                  |

### Physical

|                          |             |
|--------------------------|-------------|
| Colour                   | Black/Steel |
| Trim                     | Yes         |
| Orientation              | Adjustable  |
| Longitudinal tilting (°) | 30          |
| Recessed depth (mm)      | 75          |
| Length (mm)              | 436         |
| Net weight (kg)          | 0.66        |
| IP internal              | 20          |

### Download

Mounting instructions [↓ PDF](#)

### Photometric Files

LDT / IES [↓ ZIP](#)

### Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)


### Ecodesign and Energy Labelling

 Replaceable (LED only) light source by a professional

 Replaceable control gear by a professional



Schematic light drawing



Photometric

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| Light distribution     | Symmetric |
| CCT (K)                | 2700      |
| CRI>                   | 90        |
| Beam angle C0-180 (°)  | 11        |
| Beam angle C90-270 (°) | 12        |
| Extreme cut off        | No        |
| UGRL                   | <10       |

Electrical

|                     |                                          |
|---------------------|------------------------------------------|
| Insulation class    | II                                       |
| Frequency (Hz)      | 50/60                                    |
| Main voltage (Vac)  | 220-240                                  |
| Forward voltage (V) | 34.8                                     |
| LED current (mA)    | 900                                      |
| Power supply        | Remote included                          |
| Dimmable            | Yes                                      |
| Power supply type   | Dimmable DALI 1                          |
| Dimming interface   | Remote Dimmable<br>(Dimmer Not Included) |

Notes