




03.8860.14CUQ Black/White

Light Shadow Fixed No Trim 4 Spots Optic Spot - Non IC

Designed by FLOS Architectural, 2022

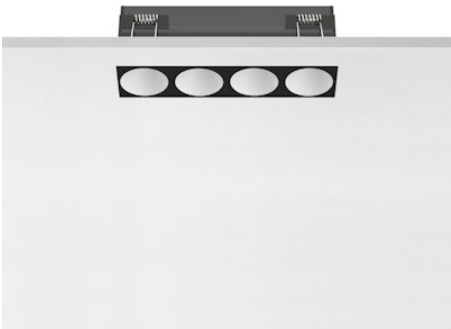

LED - Power LED - 10.8W - 1060lm - 2700K - CRI> 90 - Beam° 12

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	10.8
System power (W)	10.8
Source flux (lm)	1192
System flux (lm)	1060
Efficacy (lm/W)	98

Physical

Color	Black/White
Trim	No
Orientation	Fixed
IP internal	20
IP external	55



Download

- Family spec sheet [ZIP](#)
- Mounting instructions [PDF](#)

Photometric Files


- LDT / IES [ZIP](#)

Technical Drawings

- 2D [ZIP](#)
- 3D [ZIP](#)



Schematic light drawing



Ecodesign and Energy Labelling



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B10 > 50.000h
Beam angle C0-180 (°)	12
Beam angle C90-270 (°)	12
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	12
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

It requires a pre-installation frame, to be ordered separately.

<https://professional.flos.com/en-US/us/product/light-shadow-fixed-no-trim-4-spots-optic-spot-non-ic-03.8860.14cuq/>

03.8860.14CUQ

©2026 Flos - P.IVA 00290820174 - 9/18/2026

professional.flos.com | info@flos.com 2/3

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order to improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

Accessories & Power Supply



REQUIRED
Accessory

ACCESSORYTYPE2

08.0511.00.90
Pre-installation No Trim Frame 4L
Fix



REQUIRED
Power supply

SP20W900MA-ELV-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, ELV Dimmable, Thermal
120V



REQUIRED
Power supply

SP25W900MA-120-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
120V



REQUIRED
Power supply

SP25W900MA-277-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
277V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0052.90
Accessory for mounting of No
Trim Fix continuous line.



OPTIONAL
Housing and Hanger Bar

TRAY-0036
Registration Tray - non electrical,
place holder for non IC new
construction, Light Shadow Fixed
4 Lights Trimless