


FLOS

05.0614.40CCB White/Steel

Light Shadow Fixed Trim Casambi Version 4 Spots Square Optic Medium

Designed by FLOS Architectural, 2022

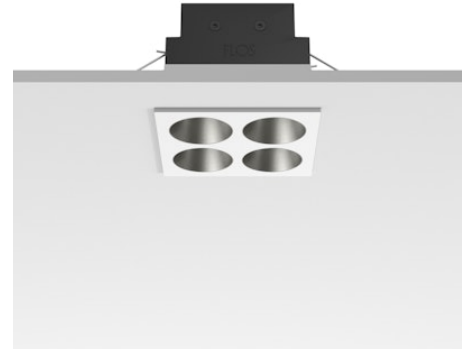

972lm - 2700K - CRI> 90 - Beam° 25

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included (220-240V). Pre-installation frame not required.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

| | |
|------------------------|---------------------|
| Mounting | Ceiling recessed |
| Environments | Indoor dry location |
| Light source type | LED |
| Light sources included | Yes |
| LED type | Power LED |
| Number of lamps | 1 |
| System power (W) | 10.8 |
| Source flux (lm) | 1169 |
| Lumen Output (lm) | 972 |
| Efficacy (lm/W) | 90 |

Physical

| | |
|-----------------|-------------|
| Colour | White/Steel |
| Trim | Yes |
| Orientation | Fixed |
| Net weight (kg) | 0.34 |
| IP internal | 20 |
| IP external | 55 |

Download

[Mounting instructions](#)  PDF

Photometric Files

[LDT / IES](#)  ZIP

Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP




Ecodesign and Energy Labelling

 Replaceable (LED only) light source by a professional

 Replaceable control gear by a professional

Schematic light drawing



| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1 | 5684 | 0.44 |
| 2 | 1421 | 0.88 |
| 3 | 632 | 1.32 |
| 4 | 355 | 1.76 |
| 5 | 227 | 2.20 |

Photometric

| | |
|--------------------------|-------------------------------|
| Lighting type | Direct |
| Light distribution | Symmetric |
| CCT (K) | 2700 |
| CRI> | 90 |
| LED Life / Failure Ratio | L80B10 > 50.000h (Tc=85°C) |
| Beam angle C0-180 (°) | 25 |
| Beam angle C90-270 (°) | 25 |
| Extreme cut off | No |
| UGR _L | <10 |

Electrical

| | |
|--------------------|------------------|
| Insulation class | II |
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 220-240 |
| LED current (mA) | 900 |
| Power supply | Remote included |
| Dimmable | Yes |
| Power supply type | Dimmable Casambi |