




05.8770.14.9S Black/White

Light Shadow Mini Adjustable No Trim 2 Spots Optic Flood

Designed by FLOS Architectural, 2025

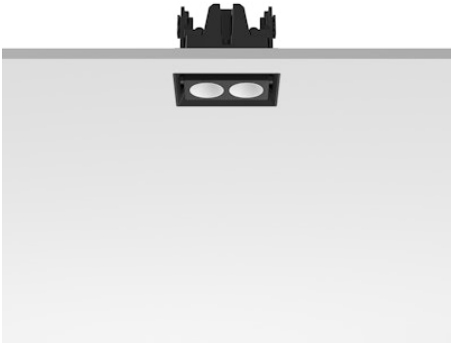

LED - Power LED - 2.2W - 180lm - 3000K - CRI> 90 - Beam° 37

Adjustable recessed luminaire with 2 LED lighting spots. Remote power supply not included (220-240V). It requires a pre-installation frame, to be ordered separately.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	2.2
System power (W)	3.4
Source flux (lm)	200
System flux (lm)	180

Physical

Color	Black/White
Orientation	Adjustable
Net weight (lb)	0.3
Gross weight (lb)	0.4
Package height (in)	0.3
Package width (in)	0.6
Package length (in)	0.3
IP internal	20

Download

[Mounting instructions](#)  PDF

Photometric Files

[LDT / IES](#)  ZIP

Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class **G**




REPLACEABLE2



PWRSUPRPL2



Schematic light drawing





Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	90
McAdam steps (SDCM)	3
Rf fidelity index	91
Rg gamut index	101
LED Life / Failure Ratio	L90B20>52.000h_Tc85°C
Beam angle C0-180 (°)	37
Beam angle C90-270 (°)	38
UGRL	<10

Electrical

Insulation class	III
Forward voltage (V)	6
LED current (mA)	400
Driver	Remote
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Accessories & Power Supply



REQUIRED
Power supply

ACCESSORYTYPE1

SP10W300MA-VAR-Y1
Splice Box UL TRIAC & 0-10V
Dimmable 300mA LED Driver
10W Size: 7" x 2.2" x 1.2"

REQUIRED
Power supply

ACCESSORYTYPE1

SP10W300MA-DAL-Y1
Splice Box UL DALI & PUSH
Dimmable 300mA LED Driver
10W Size: 7" x 2.2" x 1.2"