




05.8840.14.9S Black/White

Light Shadow Mini Adjustable No Trim 4 Spots Optic Spot

Designed by FLOS Architectural, 2025

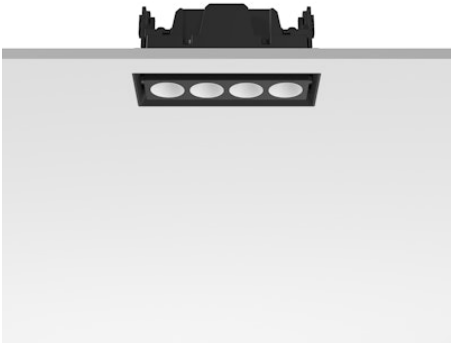

LED - Power LED - 3.9W - 342lm - 2700K - CRI> 90 - Beam° 14

Adjustable recessed luminaire with 4 LED lighting spots. Remote power supply not included (220-240V). It requires a pre-installation frame, to be ordered separately.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	3.9
System power (W)	6.2
Source flux (lm)	380
System flux (lm)	342

Physical

Color	Black/White
Orientation	Adjustable
Net weight (lb)	0.4
Gross weight (lb)	0.5
Package height (in)	0.3
Package width (in)	0.6
Package length (in)	0.3
IP internal	20

Download

Mounting instructions [↓ PDF](#)

Photometric Files

LDT / IES [↓ SVG](#)

Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class **G**




REPLACEABLE2



PWRSUPRPL2



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
Rf fidelity index	93
Rg gamut index	98
LED Life / Failure Ratio	L90B20>52.000h_Tc85°C
Beam angle C0-180 (°)	14
Beam angle C90-270 (°)	14
UGRL	<10

Electrical

Insulation class	III
Forward voltage (V)	6
LED current (mA)	400
Driver	Remote
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No