

Light Shadow Mini Dots - Single Spot Module. Set of 1 Spot Optic Spot

Designed by FLOS Architectural, 2025



LED - Power LED - 1.5W - 130lm - 2700K - CRI> 90 - Beam° 14

LED lighting luminaire to be inserted in the recessed frames (Trim/NoTrim). It requires a pre-installation frame, to be ordered separately. Installation through a bayonet system with interchangeable spots. Available in one-light versions and groups of two and four lights. Driver not included.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Recessed
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	1.5
System power (W)	2.3
Source flux (lm)	148
Lumen Output (lm)	130
Efficacy (lm/W)	56

Physical

Colour	Black
Orientation	Fixed
Recessed depth (mm)	42
Spot diameter (mm)	20
Length (mm)	20
Canopy width (mm)	0
Canopy height (mm)	0
Net weight (kg)	0.02
Package height (mm)	7
Package width (mm)	6
Package length (mm)	8
IP internal	20
IP external	54

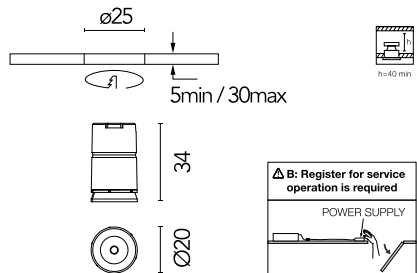

Download

Mounting instructions [Download PDF](#)

Photometric Files

LDT / IES [Download ZIP](#)


Technical Drawings

2D [Download ZIP](#)

3D [Download ZIP](#)



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
Rf fidelity index	93
Rg gamut index	98
LED Life / Failure Ratio	L90B20>52.000h_Tc85°C
Beam angle C0-180 (°)	14
Beam angle C90-270 (°)	14
Extreme cut off	Yes
UGR _L	<10

Electrical


Insulation class	III
Forward voltage (V)	3
LED current (mA)	500
Power supply	Remote
Dimmable	Yes
Power supply type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class G



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Accessories & Power Supply



REQUIRED
Power supply

Electrical

60.9439

Continuous current power supply, 0/1-10V dimmable, 220/240V - 50/60Hz, 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W / 700 / 750 / 800 / 900/ 950/ 1000 / 1050mA-36W



REQUIRED
Power supply

Electrical

60.9188

Continuous current power supply of 13-20W, 110*/240V - 50/60Hz with current selected through adjustable 200 mA - 13W / 300 mA - 15W / 350 mA - 18W / 400 / 450 / 500 / 550 / 600 / 650 / 700 / 750 / 800 / 850 / 900 mA - 20W. switch. 0/1-10V or push.



REQUIRED
Power supply

Electrical

60.9207

Casambi continuous current power supply, dimmable 220/240V - 50/60Hz, 300mA - 16W / 350mA - 18,5W / 400mA - 21,5W / 450 mA - 24W / 500mA - 27W / 600mA - 32W / 650 mA - 35W / 700 mA - 36W / 750 / 800 / 900 / 1000 / 1050 / 1200 mA - 38W.



REQUIRED
Power supply

Electrical

60.9467

Mains dimming 20W Constant current power supply, AC phase-cut adjustable, trailing & leading edge dimming, 220/240V - 50/60Hz, with dip-switch programmable power supply current. Output current: 900mA - 20W / 850mA - 20W / 800mA - 20W / 750mA - 20W / 70...



REQUIRED
Frame

Mounting

08.1050.00

Frame No Trim for Light Shadow Mini Dots 1L



REQUIRED
Frame

Mounting

08.1053.14

Frame Trim for Light Shadow Mini Dots 1L



REQUIRED
Frame

Mounting

08.1053.40

Frame Trim for Light Shadow Mini Dots 1L



REQUIRED
Power supply

Electrical

60.7887

Constant current power supply 3W, 220-240V - 50/60Hz fixed supply current. Non-dimmable. Output current: 2.25W - 500mA



REQUIRED
Power supply

Electrical

60.7744

Continuous current supply source
of 220-240V - 50/60Hz - 350mA
4,5W - 500mA 6,5W - 600mA
7,5W - 700mA 9W selectable by
switch, dimmable Dali 2 & Push

REQUIRED
Power supply

Electrical

60.9874.0500

Continuous current supply source
of 220-240V - 50/60Hz - 500mA
15W with dimmable Casambi

REQUIRED
Power supply

Electrical

60.9957.0500

Continuous current supply source
of 220-240V - 50/60Hz -
500mA.with dimmable Dali 2

REQUIRED
Power supply

Electrical

60.9954.0500

Continuous current supply source
of 220-240V - 50/60Hz - 500mA
25W, Non dimmable

FLOS

OPTIONAL
Accessory

08.1062.90

Extraction tool for Light Shadow
Mini Dots