

## Light Shadow Mini Fixed No Trim 2 Spots Optic Flood

Designed by FLOS Architectural, 2025

LED - Power LED - 2.2W - 168lm - 2700K - CRI> 90 - Beam° 37

Fixed recessed luminaire with 2 LED lighting spots. Remote power supply not included (220-240V).It requires a pre-installation frame,to be ordered separately.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Recessed            |
| Environments           | Indoor dry location |
| Light Source Type      | LED                 |
| Light sources included | Yes                 |
| LED type               | Power LED           |
| Lamp category          | LED                 |
| Number of lamps        | 1                   |
| Power (W)              | 2.2                 |
| System power (W)       | 3.4                 |
| Source flux (lm)       | 190                 |
| System flux (lm)       | 168                 |

### Physical

|                     |             |
|---------------------|-------------|
| Color               | Black/Steel |
| Orientation         | Fixed       |
| Net weight (lb)     | 0.2         |
| Gross weight (lb)   | 0.3         |
| Package height (in) | 0.3         |
| Package width (in)  | 0.6         |
| Package length (in) | 0.3         |
| IP internal         | 20          |
| IP external         | 54          |



### Download

Mounting instructions  PDF

### Photometric Files

LDT / IES  ZIP


### Technical Drawings

2D  ZIP


3D  ZIP

### Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class G

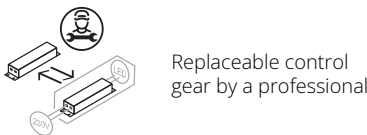

Schematic light drawing



Photometric

|                          |                       |
|--------------------------|-----------------------|
| Lighting type            | Direct                |
| Light distribution       | Symmetric             |
| CCT (K)                  | 2700                  |
| CRI>                     | 90                    |
| McAdam steps (SDCM)      | 3                     |
| Rf fidelity index        | 93                    |
| Rg gamut index           | 98                    |
| LED Life / Failure Ratio | L90B20>52.000h_Tc85°C |
| Beam angle C0-180 (°)    | 37                    |
| Beam angle C90-270 (°)   | 37                    |
| UGRL                     | <10                   |

Electrical

|                     |                                       |
|---------------------|---------------------------------------|
| Insulation class    | III                                   |
| Forward voltage (V) | 6                                     |
| LED current (mA)    | 400                                   |
| Driver              | Remote                                |
| Dimmable            | Yes                                   |
| Dimming type        | Dimmable                              |
| Dimming interface   | Remote Dimmable (Dimmer Not Included) |
| Batteries inside    | No                                    |

Accessories & Power Supply



REQUIRED  
Frame

ACCESSORYTYPE3

08.1056.00  
Pre-installation Light Shadow Mini  
No Trim Frame 2L Fix



REQUIRED  
Power supply

ACCESSORYTYPE1

SP10W300MA-DAL-Y1  
Splice Box UL DALI & PUSH  
Dimmable 300mA LED Driver  
10W Size: 7" x 2.2" x 1.2"



REQUIRED  
Power supply

ACCESSORYTYPE1

SP10W300MA-VAR-Y1  
Splice Box UL TRIAC & 0-10V  
Dimmable 300mA LED Driver  
10W Size: 7" x 2.2" x 1.2"