

Light Shadow Mini Fixed No Trim 2 Spots Optic Spot

Designed by FLOS Architectural, 2025

LED - Power LED - 2.2W - 168lm - 2700K - CRI> 90 - Beam° 14

Fixed recessed luminaire with 2 LED lighting spots. Remote power supply not included (220-240V).It requires a pre-installation frame,to be ordered separately.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	2.2
System power (W)	3.4
Source flux (lm)	190
System flux (lm)	168

Physical

Color	Black/Bronze
Orientation	Fixed
Net weight (lb)	0.2
Gross weight (lb)	0.3
Package height (in)	0.3
Package width (in)	0.6
Package length (in)	0.3
IP internal	20
IP external	54

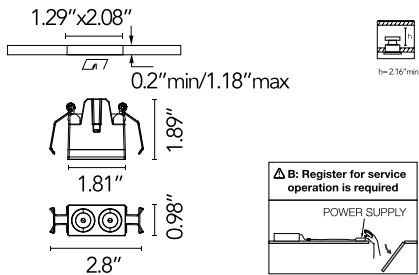

Download

- Family spec sheet [ZIP](#)
- Mounting instructions [PDF](#)

Photometric Files


- LDT / IES [ZIP](#)

Technical Drawings

- 2D [ZIP](#)
- 3D [ZIP](#)



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
Rf fidelity index	93
Rg gamut index	98
LED Life / Failure Ratio	L90B20>52.000h_Tc85°C
Beam angle C0-180 (°)	14
Beam angle C90-270 (°)	14
UGR _L	<10

Electrical

Insulation class	III
Forward voltage (V)	6
LED current (mA)	400
Driver	Remote
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class G

Replaceable (LED only) light source by a professional

Replaceable control gear by a professional

Accessories & Power Supply




REQUIRED
Frame

Mounting

08.1056.00

Pre-installation Light Shadow Mini
No Trim Frame 2L Fix




REQUIRED
Power supply

Electrical

SP10W300MA-DAL-Y1

Splice Box UL DALI & PUSH
Dimmable 300mA LED Driver
10W Size: 7" x 2.2" x 1.2"



REQUIRED
Power supply

Electrical

SP10W300MA-VAR-Y1

Splice Box UL TRIAC & 0-10V
Dimmable 300mA LED Driver
10W Size: 7" x 2.2" x 1.2"