




05.8505.14.9S Black/White

Light Shadow Mini Fixed Trim 2 Spots Optic Medium

Designed by FLOS Architectural, 2025

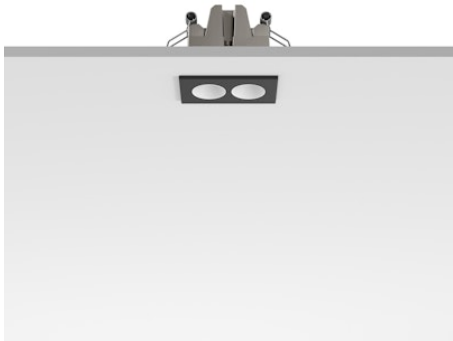

LED - Power LED - 2.2W - 175lm - 2700K - CRI> 90 - Beam° 26

Fixed recessed luminaire with 2 LEDlighting spots. Remote power supply not included (220-240V). No pre-installation frame required.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	2.2
System power (W)	3.4
Source flux (lm)	190
System flux (lm)	175

Physical

Color	Black/White
Orientation	Fixed
Net weight (lb)	0.2
Gross weight (lb)	0.3
Package height (in)	0.3
Package width (in)	0.6
Package length (in)	0.3
IP internal	20
IP external	54

Download

Mounting instructions [↓ PDF](#)

Photometric Files

LDT / IES [↓ ZIP](#)

Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class **G**




REPLACEABLE2



PWRSUPRPL2



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
Rf fidelity index	93
Rg gamut index	98
LED Life / Failure Ratio	L90B20>52.000h_Tc85°C
Beam angle C0-180 (°)	26
Beam angle C90-270 (°)	26
UGRL	<10

Electrical

Insulation class	III
Forward voltage (V)	6
LED current (mA)	300
Driver	Remote
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No


Accessories & Power Supply



REQUIRED
Power supply

ACCESSORYTYPE1

SP10W300MA-DAL-Y1
Splice Box UL DALI & PUSH
Dimmable 300mA LED Driver
10W Size: 7" x 2.2" x 1.2"



REQUIRED
Power supply

ACCESSORYTYPE1

SP10W300MA-VAR-Y1
Splice Box UL TRIAC & 0-10V
Dimmable 300mA LED Driver
10W Size: 7" x 2.2" x 1.2"