

Light Shadow Spot 60 Non Dimmable

Designed by FLOS Architectural, 2022



22W - 1485lm - 4000K - CRI> 90 - Beam° 33

Projector to be installed on threephase track with LED light source. Built-in 220-240V, 50-60Hz power supply. All finishes come with black track adapter, arm and back of the head. In the "all white" versions the track adapter, arm and back of the head come in white. The display is always offered in high loss technical black anti-glare finish. For other finishes, please consult us.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Track
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED array
Number of lamps	1
Power (W)	22
Source flux (lm)	1815
Lumen Output (lm)	1485

Physical

Colour	White
Orientation	Adjustable
Rotation (°)	360
Longitudinal tilting (°)	90
Net weight (kg)	0.5
IP internal	20

Download

Mounting instructions



Photometric Files

LDT / IES



Technical Drawings

2D




3D




Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class G

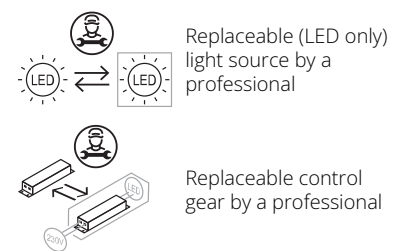

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	4000
CRI>	90
Rf fidelity index	92
Rg gamut index	99
LED Life / Failure Ratio	L80B50>47.000h_Tc85°C
Beam angle C0-180 (°)	33
Beam angle C90-270 (°)	33
UGRL	<10

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
LED current (mA)	500
Power supply	Integrated
Dimmable	No
Power supply type	Dimmer on board
Dimming range (%)	N/A

Accessories & Power Supply



OPTIONAL
Filter

ACCESSORYTYPE4

08.0796.00
CCT Inreaser Filter D58 for LS
Spot 60 SuperSpot



OPTIONAL
Filter

ACCESSORYTYPE4

08.0797.00
CCT Decreaser Filter D12 for LS
Spot 60 SuperSpot



OPTIONAL
Filter

ACCESSORYTYPE4

08.0798.00
CCT Inreaser Filter D58 for LS
Spot 60 Spot / Medium / Flood /
Wide Flood



OPTIONAL
Filter

ACCESSORYTYPE4

08.0799.00
CCT Decreaser Filter D12 for LS
Spot 60 Spot / Medium / Flood /
Wide Flood



OPTIONAL
Accessory

08.0175.14
Honeycomb for LS SPOT 60
SuperSpot



OPTIONAL
Accessory

08.0176.14
Honeycomb for LS SPOT 60 Spot
/ Medium / Flood / Wide Flood