

## Light Shadow Spot Non Dimmable

Designed by FLOS Architectural, 2020



LED - Power LED - 3W - 277lm - 4000K - CRI> 90 - Beam° 29

LED accent lighting module for installation in the The Micro Running Magnet Pro system. Integrated DC/DC electronic current converter. On/Off version, non-dimmable.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Track               |
| Environments           | Indoor dry location |
| Light Source Type      | LED                 |
| Light sources included | Yes                 |
| LED type               | Power LED           |
| Lamp category          | LED                 |
| Number of lamps        | 1                   |
| Power (W)              | 3                   |
| Source flux (lm)       | 335                 |
| System flux (lm)       | 277                 |

### Physical

|                          |            |
|--------------------------|------------|
| Color                    | White      |
| Orientation              | Adjustable |
| Rotation (°)             | 267        |
| Longitudinal tilting (°) | 90         |
| Length (in)              | 1.62       |
| Net weight (lb)          | 0.2        |
| Gross weight (lb)        | 0.29       |
| IP internal              | 20         |

### Download

|                       |                     |
|-----------------------|---------------------|
| Family spec sheet     | <a href="#">ZIP</a> |
| Mounting instructions | <a href="#">PDF</a> |


### Photometric Files

|           |                     |
|-----------|---------------------|
| LDT / IES | <a href="#">ZIP</a> |
|-----------|---------------------|


### Technical Drawings

|    |                     |
|----|---------------------|
| 2D | <a href="#">ZIP</a> |
| 3D | <a href="#">ZIP</a> |

### Ecodesign and Energy Labelling

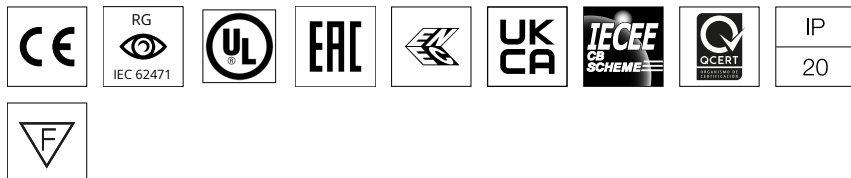

Schematic light drawing



Photometric

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| Light distribution     | Symmetric |
| CCT (K)                | 4000      |
| CRI>                   | 90        |
| Beam angle C0-180 (°)  | 29        |
| Beam angle C90-270 (°) | 29        |
| Extreme cut off        | No        |
| UGRL                   | <10       |

Electrical

|                     |                                       |
|---------------------|---------------------------------------|
| Insulation class    | III                                   |
| Forward voltage (V) | 24                                    |
| LED current (mA)    | 880                                   |
| Driver              | Remote excluded                       |
| Dimmable            | Yes                                   |
| Dimming type        | Non Dimmable, Dimmable                |
| Dimming interface   | Remote Dimmable (Dimmer Not Included) |
| Batteries inside    | No                                    |