

# FLOS



03.8961.14A9S White/Black/Black

## Light Shadow Surface 4 Spots Optic Spot

Designed by FLOS Architectural




LED - Power LED - 11W - 773lm - 3000K - CRI> 90 - Beam° 10

Surface luminaire with 4 LED lighting spots. For remote power source, not included.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



### Main specifications

Mounting	Ceiling surface
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	11
Source flux (lm)	1140
System flux (lm)	773

### Physical

Color	White/Black/Black
Orientation	Fixed
Length (in)	7
Net weight (lb)	1.33
Gross weight (lb)	1.44
Package volume (in)	62
IP internal	44

### Download

Family spec sheet [ZIP](#)

Mounting instructions [PDF](#)


### Photometric Files

LDT / IES [ZIP](#)

### Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional

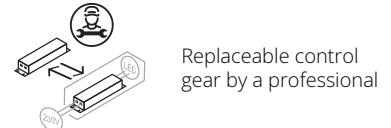

Replaceable control gear by a professional

## Schematic light drawing





## Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	90
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	10
Beam angle C90-270 (°)	10
UGR <sub>L</sub>	<10

## Electrical

Forward voltage (V)	12
LED current (mA)	900
Driver	Remote
Dimmable	Yes
Dimming type	Non Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

## Accessories & Power Supply



### REQUIRED

08.0252.40.19

Surface Spacer

### REQUIRED

08.0252.14.19

Surface Spacer

### REQUIRED

Installation

JBOX.0001.14





Custom Junction Box Light  
Shadow Surface, Black, New  
construction

### REQUIRED

Installation

JBOX.0001.40

Custom Junction Box Light  
Shadow Surface, Black, New  
construction



### REQUIRED Power supply

SP40W900MA-10V-A01  
Splice Box 7"x3-5/8"x1-1/4",  
900mA , 40W, 0-10V Dimmable,  
120/277V

### REQUIRED Power supply

SP18W900MA-LUE-S01  
Splice Box 18W, 1% dim, Lutron  
Digital Ecosystem

### REQUIRED Power supply

SP18W900MA-PEQ-S01  
Splice Box 18W, 0.1% dim, Lutron  
Digital Eco system 0.1% dim, Soft  
on- Fade to dark, 900mA 120V.  
Size: 9" x 3.59" x 1.25'

### REQUIRED Power supply

SP18W900MA-LDE-S01  
Splice Box 18W, Soft on- Fade to  
dark, 900mA 120V.