

## Light Stripe Diffused Broadcast

Designed by FLOS Architectural, 2026



LED - Top LED - 9W - 460lm - 3000K - CRI> 90 - Beam° 114

LED lighting module with diffuse light for installation in the The Micro Running Magnet Pro system. Broadcast version, with simultaneous control of all luminaires.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Track               |
| Environments           | Indoor dry location |
| Light source type      | LED                 |
| Light sources included | Yes                 |
| LED type               | Top LED             |
| Lamp category          | LED                 |
| Number of lamps        | 1                   |
| Power (W)              | 9                   |
| System power (W)       | 11                  |
| Source flux (lm)       | 460                 |
| Lumen Output (lm)      | 460                 |
| Efficacy (lm/W)        | 41.82               |

### Physical

|                 |       |
|-----------------|-------|
| Colour          | Black |
| Orientation     | Fixed |
| Length (mm)     | 600   |
| Net weight (kg) | 0.09  |
| IP internal     | 20    |

### Drawing Thumbnail

#### Download

Mounting instructions  PDF

#### Photometric Files


LDT / IES  ZIP

#### Technical Drawings


2D  ZIP

3D  ZIP


### Ecodesign and Energy Labelling



Replaceable (LED only)  
light source by a  
professional

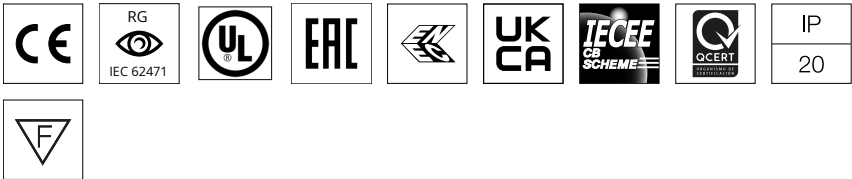

Schematic light drawing



Photometric

|                          |                           |
|--------------------------|---------------------------|
| Lighting type            | Direct                    |
| Light distribution       | Asymmetric                |
| CCT (K)                  | 3000                      |
| CRI>                     | 90                        |
| McAdam steps (SDCM)      | 2                         |
| LED Life / Failure Ratio | L90B10>100.000h (Tc=71°C) |
| Beam angle C0-180 (°)    | 114                       |
| Beam angle C90-270 (°)   | 135                       |
| Extreme cut off          | No                        |

Electrical

|                     |                                       |
|---------------------|---------------------------------------|
| Insulation class    | III                                   |
| Forward voltage (V) | 24                                    |
| Power supply        | Remote excluded                       |
| Dimmable            | Yes                                   |
| Power supply type   | Non Dimmable, Dimmable                |
| Dimming interface   | Remote Dimmable (Dimmer Not Included) |