

## Light Stripe Diffused Non Dimmable

Designed by FLOS Architectural, 2020



LED - Top LED - 13.5W - 678lm - 5000K - CRI> 90 - Beam° 114

Diffuse LED lighting module for installation in the The Micro Running Magnet Pro system. On/Off version, non-dimmable.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Track               |
| Environments           | Indoor dry location |
| Light Source Type      | LED                 |
| Light sources included | Yes                 |
| LED type               | Top LED             |
| Lamp category          | LED                 |
| Number of lamps        | 1                   |
| Power (W)              | 13.5                |
| System power (W)       | 17                  |
| Source flux (lm)       | 678                 |
| System flux (lm)       | 678                 |
| Efficacy (lm/W)        | 39.88               |

### Physical

|                   |       |
|-------------------|-------|
| Color             | Black |
| Orientation       | Fixed |
| Length (in)       | 35.44 |
| Net weight (lb)   | 0.2   |
| Gross weight (lb) | 0.42  |
| IP internal       | 20    |

### Download

|                       |     |
|-----------------------|-----|
| Family spec sheet     | ZIP |
| Mounting instructions | PDF |


### Photometric Files

|           |     |
|-----------|-----|
| LDT / IES | ZIP |
|-----------|-----|


### Technical Drawings

|    |     |
|----|-----|
| 2D | ZIP |
| 3D | ZIP |

### Ecodesign and Energy Labelling

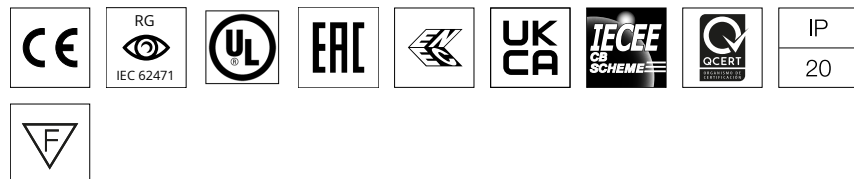

Schematic light drawing



Photometric

|                          |                           |
|--------------------------|---------------------------|
| Lighting type            | Direct                    |
| Light distribution       | Asymmetric                |
| CCT (K)                  | 5000                      |
| CRI>                     | 90                        |
| McAdam steps (SDCM)      | 2                         |
| LED Life / Failure Ratio | L90B10>100.000h (Tc=71°C) |
| Beam angle C0-180 (°)    | 114                       |
| Beam angle C90-270 (°)   | 135                       |

Electrical

|                     |                                       |
|---------------------|---------------------------------------|
| Insulation class    | III                                   |
| Forward voltage (V) | 24                                    |
| Driver              | Remote excluded                       |
| Dimmable            | Yes                                   |
| Dimming type        | Non Dimmable, Dimmable                |
| Dimming interface   | Remote Dimmable (Dimmer Not Included) |