

FLOS

03.2286.14 Black

Light Stripe Wall-Washer

Designed by FLOS Architectural, 2020




LED - Top LED - 9W - 427lm - 4000K - CRI> 90 - Beam° 114

Asymmetric wall-washer LED light module to be installed in The Micro Running Magnet System.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



Main specifications

Mounting	Track
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	9
System power (W)	11
Source flux (lm)	427
System flux (lm)	427
Efficacy (lm/W)	38.82

Physical

Color	Black
Orientation	Fixed
Length (in)	23.63
Net weight (lb)	0.2
Gross weight (lb)	0.36
IP internal	20

Download


Family spec sheet [ZIP](#)
Mounting instructions [PDF](#)

Photometric Files

LDT / IES [ZIP](#)

Technical Drawings


2D [ZIP](#)
3D [ZIP](#)

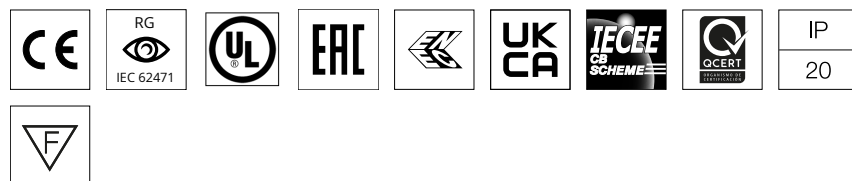

Ecodesign and Energy Labelling

Replaceable (LED only) light source by a professional

Schematic light drawing



Beam Angle:

h(m)	E(lx)	D(m)
1	6	
2	11	
3	24	
4	96	
5	0	

Photometric

Lighting type	Direct
Light distribution	Asymmetric
CCT (K)	4000
CRI>	90
McAdam steps (SDCM)	2
LED Life / Failure Ratio	L90B10>100.000h (Tc=71°C)
Beam angle C0-180 (°)	114
Beam angle C90-270 (°)	135

Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	Yes
Dimming type	Non Dimmable, Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)