

Light Stripe Wall-Washer Non Dimmable

Designed by FLOS Architectural, 2020



LED - Top LED - 4.5W - 207lm - 3000K - CRI> 90 - Beam° 114

Asymmetric LED wall-washer lighting module for installation in the The Micro Running Magnet Pro system. On/Off version, non-dimmable.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Track
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	4.5
System power (W)	5
Source flux (lm)	207
Lumen Output (lm)	207
Efficacy (lm/W)	41.4

Physical

Colour	Black
Orientation	Fixed
Length (mm)	300
Net weight (kg)	0.09
IP internal	20

Download

Mounting instructions



Photometric Files

LDT / IES



Technical Drawings

2D



3D




Bim




Ecodesign and Energy Labelling



REPLACEABLE2

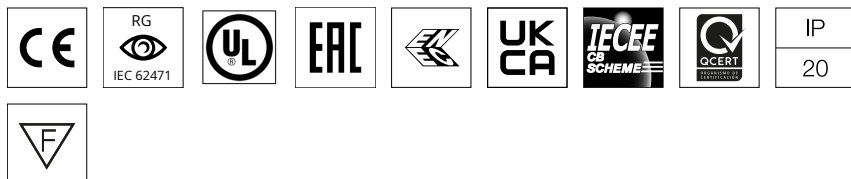

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Asymmetric
CCT (K)	3000
CRI>	90
McAdam steps (SDCM)	2
LED Life / Failure Ratio	L90B10>100.000h (Tc=71°C)
Beam angle C0-180 (°)	114
Beam angle C90-270 (°)	135

Electrical

Insulation class	III
Forward voltage (V)	24
Power supply	Remote excluded
Dimmable	Yes
Power supply type	Non Dimmable, Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)