

Light Stripe Wall-Washer Non Dimmable

Designed by FLOS Architectural, 2020



LED - Top LED - 4.5W - 213lm - 4000K - CRI> 90 - Beam° 114

Asymmetric LED wall-washer lighting module for installation in the The Micro Running Magnet Pro system. On/Off version, non-dimmable.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Track
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	4.5
System power (W)	5
Source flux (lm)	213
System flux (lm)	213
Efficacy (lm/W)	42.6

Physical

Color	Black
Orientation	Fixed
Length (in)	11.82
Net weight (lb)	0.2
Gross weight (lb)	0.18
IP internal	20

Download

Family spec sheet	ZIP
Mounting instructions	PDF


Photometric Files

LDT / IES	ZIP
-----------	---------------------


Technical Drawings

2D	ZIP
3D	ZIP

Ecodesign and Energy Labelling

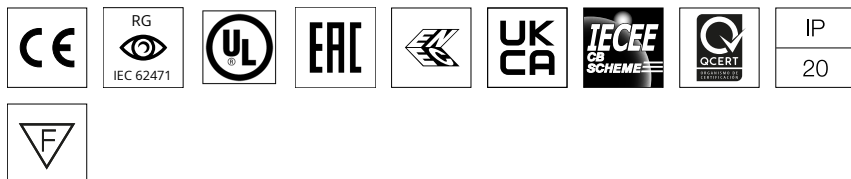

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Asymmetric
CCT (K)	4000
CRI>	90
McAdam steps (SDCM)	2
LED Life / Failure Ratio	L90B10>100.000h (Tc=71°C)
Beam angle C0-180 (°)	114
Beam angle C90-270 (°)	135

Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	Yes
Dimming type	Non Dimmable, Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)