

Light Stripe Wall-Washer Non Dimmable

Designed by FLOS Architectural, 2020



LED - Top LED - 9W - 427lm - 4000K - CRI> 90 - Beam° 114

Asymmetric LED wall-washer lighting module for installation in the The Micro Running Magnet Pro system. On/Off version, non-dimmable.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Track
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	9
System power (W)	11
Source flux (lm)	427
Lumen Output (lm)	427
Efficacy (lm/W)	38.82

Physical

Colour	Black
Orientation	Fixed
Length (mm)	600
Net weight (kg)	0.09
IP internal	20

Download

Mounting instructions

[PDF](#)

Photometric Files

LDT / IES

[ZIP](#)

Technical Drawings

2D

[ZIP](#)

3D

[ZIP](#)


[Bim](#)

[ZIP](#)


Ecodesign and Energy Labelling



REPLACEABLE2

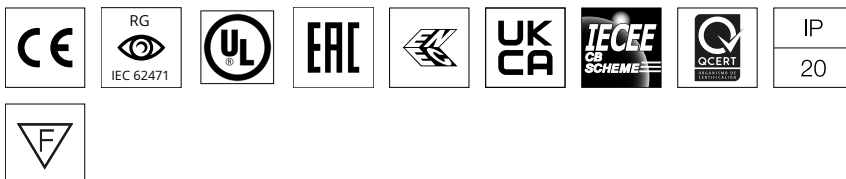

Schematic light drawing



Beam Angle:

h(m)	E(lx)	D(m)
1	6	
2	11	
3	24	
4	96	
5	0	

Luminous flux luminaire
427 lm

Photometric

Lighting type	Direct
Light distribution	Asymmetric
CCT (K)	4000
CRI>	90
McAdam steps (SDCM)	2
LED Life / Failure Ratio	L90B10>100.000h (Tc=71°C)
Beam angle C0-180 (°)	114
Beam angle C90-270 (°)	135

Electrical

Insulation class	III
Forward voltage (V)	24
Power supply	Remote excluded
Dimmable	Yes
Power supply type	Non Dimmable, Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)