

Light Stripe Wall-Washer Non Dimmable

Designed by FLOS Architectural, 2020



LED - Top LED - 9W - 427lm - 4000K - CRI> 90 - Beam° 114

Asymmetric LED wall-washer lighting module for installation in the The Micro Running Magnet Pro system. On/Off version, non-dimmable.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Track
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	9
System power (W)	11
Source flux (lm)	427
System flux (lm)	427
Efficacy (lm/W)	38.82

Physical

Color	Black
Orientation	Fixed
Length (in)	23.63
Net weight (lb)	0.2
Gross weight (lb)	0.36
IP internal	20

Download

Family spec sheet	ZIP
Mounting instructions	PDF


Photometric Files

LDT / IES	ZIP
-----------	-----


Technical Drawings

2D	ZIP
3D	ZIP

Ecodesign and Energy Labelling

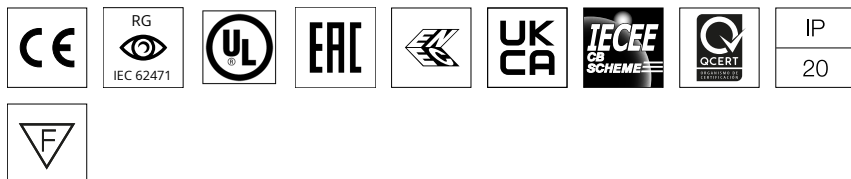

Schematic light drawing



Beam Angle:

h(m)	E(lx)	D(m)
1	6	
2	11	
3	24	
4	96	
5	0	

Luminous flux luminaire
427 lm

Photometric

Lighting type	Direct
Light distribution	Asymmetric
CCT (K)	4000
CRI>	90
McAdam steps (SDCM)	2
LED Life / Failure Ratio	L90B10>100.000h (Tc=71°C)
Beam angle C0-180 (°)	114
Beam angle C90-270 (°)	135

Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	Yes
Dimming type	Non Dimmable, Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)