

Light Stripe Wall-Washer Non Dimmable

Designed by FLOS Architectural, 2020



LED - Top LED - 18W - 829lm - 3000K - CRI> 90 - Beam° 114

Asymmetric LED wall-washer lighting module for installation in the The Micro Running Magnet Pro system. On/Off version, non-dimmable.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Track
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	18
System power (W)	23.5
Source flux (lm)	829
Lumen Output (lm)	829
Efficacy (lm/W)	35.28

Physical

Colour	Black
Orientation	Fixed
Length (mm)	1200
Net weight (kg)	0.09
IP internal	20

Download

Mounting instructions

↓ PDF

Photometric Files

LDT / IES

↓ ZIP

Technical Drawings

2D

↓ ZIP

3D

↓ ZIP


🔒 Bim

↓ ZIP


Ecodesign and Energy Labelling



REPLACEABLE2

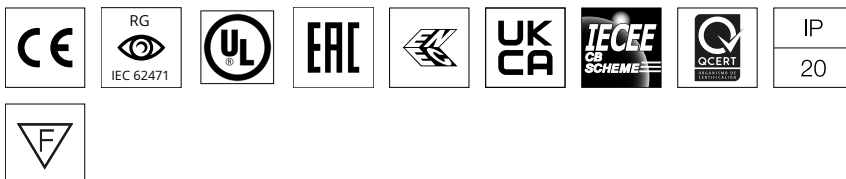

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Asymmetric
CCT (K)	3000
CRI>	90
McAdam steps (SDCM)	2
LED Life / Failure Ratio	L90B10>100.000h (Tc=71°C)
Beam angle C0-180 (°)	114
Beam angle C90-270 (°)	135

Electrical

Insulation class	III
Forward voltage (V)	24
Power supply	Remote excluded
Dimmable	Yes
Power supply type	Non Dimmable, Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)