

# FLOS

03.6826.40A White

## Light Supply Fixed No Trim

Designed by FLOS Architectural, 2017



Recessed luminaire with LED light source. Remote 220/240V power supply included.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED array
Lamp category	LED
Number of lamps	1
Power (W)	29
Source flux (lm)	2910
Lumen Output (lm)	1487

### Physical

Colour	White
Trim	No
Orientation	Fixed
Recessed depth (mm)	277
Net weight (kg)	0.98
IP internal	20
IP external	44

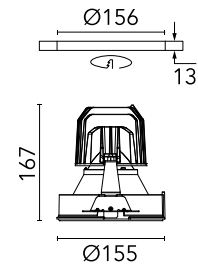

### Download

[Mounting instructions](#)  PDF

[Item information](#)  JPG

### Photometric Files


[LDT / IES](#)  ZIP

### Technical Drawings


[2D](#)  ZIP

[3D](#)  ZIP

[Bim](#)  ZIP

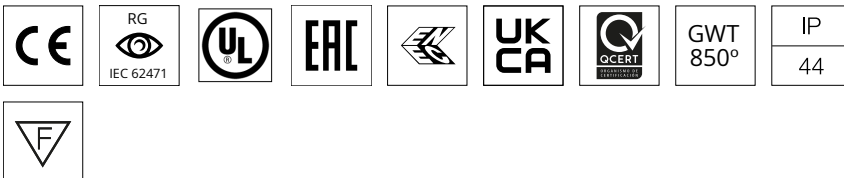

## Schematic light drawing



Beam Angle: 62°

h(m)	E(lx)	D(m)
1	1492	1.19
2	373	2.39
3	166	3.58
4	93	4.77
5	60	5.97

Luminous flux Luminaire  
1487 lm (EXTREME CUT OFF)

## Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	90
Beam angle C0-180 (°)	62
Beam angle C90-270 (°)	62
UGR <sub>L</sub>	<19

## Electrical

Insulation class	II
Frequency (Hz)	50/60
Forward voltage (V)	36.5
Power supply	Remote included
Dimmable	No
Power supply type	Non Dimmable
Emergency	No

## Notes

Pre-installation frame. To be ordered separately.