

# FLOS

03.6827.40A White

## Light Supply Wall-Washer No Trim

Designed by FLOS Architectural, 2017



Recessed luminaire with LED light source. Remote 220/240V power supply included.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED array
Lamp category	LED
Number of lamps	1
Power (W)	33.2
Source flux (lm)	3959
Lumen Output (lm)	2142

### Physical

Colour	White
Trim	No
Orientation	Fixed
Recessed depth (mm)	290
Net weight (kg)	1.01
IP internal	20
IP external	44

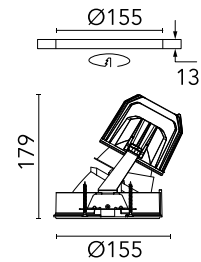

### Download

[Mounting instructions](#) PDF

[Item information](#) JPG

### Photometric Files


[LDT / IES](#) ZIP

### Technical Drawings


[2D](#) ZIP

[3D](#) ZIP

[Bim](#) ZIP

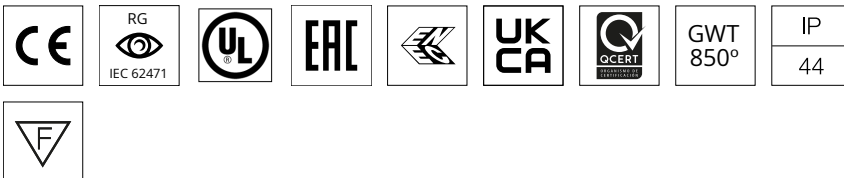

## Schematic light drawing



Beam Angle: 36°

h(m)	E(lx)	D(m)
1	2531	0.74
2	633	1.48
3	281	2.22
4	158	2.95
5	101	3.69

Luminous flux luminaire  
2142 lm (EXTREME CUT OFF)

### Photometric

Lighting type	Direct, Indirect
Light distribution	Asymmetric
CCT (K)	3000
CRI>	80
Beam angle C0-180 (°)	36
Beam angle C90-270 (°)	51

### Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Power supply	Remote included
Dimmable	No
Power supply type	Non Dimmable
Emergency	No

### Notes

Pre-installation frame. To be ordered separately.

---