

# FLOS

03.6828.06A Aluminum

## Light Supply Wall-Washer No Trim

Designed by FLOS Architectural, 2017



Recessed luminaire with LED light source. Remote 220/240V power supply included.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED array
Lamp category	LED
Number of lamps	1
Power (W)	33.2
Source flux (lm)	3506
Lumen Output (lm)	1989

### Physical

Colour	Aluminum
Trim	No
Orientation	Fixed
Recessed depth (mm)	290
Net weight (kg)	1.01
IP internal	20
IP external	44

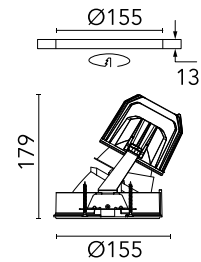

### Download

[Mounting instructions](#) [↓ PDF](#)

[Item information](#) [↓ JPG](#)

### Photometric Files


[LDT / IES](#) [↓ ZIP](#)

### Technical Drawings


[2D](#) [↓ ZIP](#)

[3D](#) [↓ ZIP](#)

[Bim](#) [↓ ZIP](#)

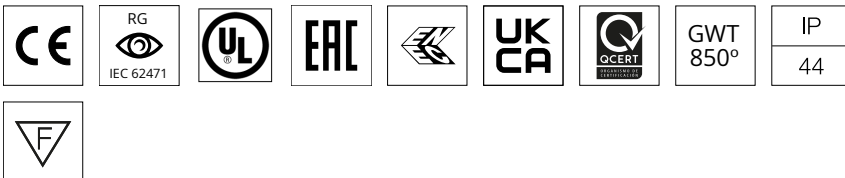

## Schematic light drawing



Beam Angle: 34°

h(m)	E(lx)	D(m)
1	2696	0.67
2	674	1.35
3	300	2.02
4	168	2.69
5	108	3.37

Luminous flux luminaire  
1989 lm (EXTREME CUT OFF)

## Photometric

Lighting type	Direct, Indirect
Light distribution	Asymmetric
CCT (K)	4000
CRI>	90
Beam angle C0-180 (°)	34
Beam angle C90-270 (°)	48

## Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Power supply	Remote included
Dimmable	No
Power supply type	Non Dimmable
Emergency	No

## Notes

Pre-installation frame. To be ordered separately.