

FLOS

03.6829.06A Aluminum

Light Supply Wall-Washer No Trim

Designed by FLOS Architectural, 2017



Recessed luminaire with LED light source. Remote 220/240V power supply included.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED array
Lamp category	LED
Number of lamps	1
Power (W)	33.2
Source flux (lm)	3225
Lumen Output (lm)	1909

Physical

Colour	Aluminum
Trim	No
Orientation	Fixed
Recessed depth (mm)	290
Net weight (kg)	1.01
IP internal	20
IP external	44

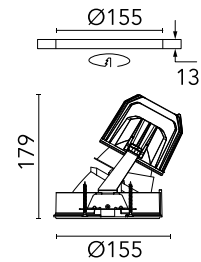

Download

[Mounting instructions](#) PDF

[Item information](#) JPG

Photometric Files


[LDT / IES](#) ZIP

Technical Drawings


[2D](#) ZIP

[3D](#) ZIP

[Bim](#) ZIP

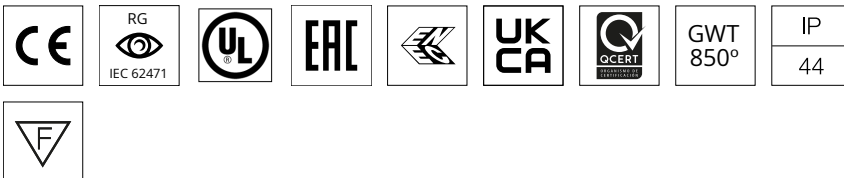

Schematic light drawing



Beam Angle: 34°

h(m)	E(lx)	D(m)
1	2588	0.67
2	647	1.35
3	288	2.02
4	162	2.69
5	104	3.37

Luminous flux luminaire
1909 lm (EXTREME CUT OFF)

Photometric

Lighting type	Direct, Indirect
Light distribution	Asymmetric
CCT (K)	3000
CRI>	90
Beam angle C0-180 (°)	34
Beam angle C90-270 (°)	48

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Power supply	Remote included
Dimmable	No
Power supply type	Non Dimmable
Emergency	No

Notes

Pre-installation frame. To be ordered separately.