

FLOS

03.8110.14ACB Black

Light Tube Ø 30 Indirect 900 mm Casambi integrated


Designed by Vincent Van Duysen



Diffused LED light module to be installed in The Infra-Structure.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

Mounting	Track
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Top LED
Number of lamps	1
Power (W)	23

Physical

Colour	Black
Orientation	Fixed
Length (mm)	944
Net weight (kg)	0.8
Package volume (m3)	0.03
IP internal	20

Download

[Mounting instructions](#) PDF

Photometric Files

[LDT / IES](#) ZIP

Technical Drawings


[2D](#) ZIP

[3D](#) ZIP

[Bim](#) ZIP



Schematic light drawing



h(m)	E(lx)	D(m)
1	541	2.10
2	135	4.20
3	60	6.30
4	34	8.40
5	22	10.51

Photometric


Lighting type	Indirect
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
Beam angle C0-180 (°)	93
Beam angle C90-270 (°)	102
UGR _L	<10

Electrical

Insulation class	III
Forward voltage (V)	48
Power supply	Remote
Dimmable	Yes
Power supply type	Dimmable Casambi
Dimming interface	Remote Dimmable (Dimmer Not Included)

Ecodesign and Energy

Labelling

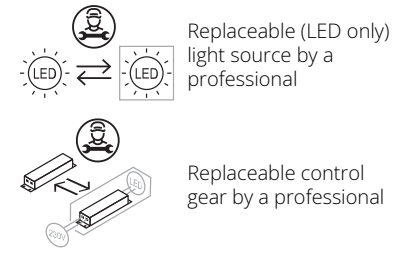

Notes

System turning fastening elements 0°-90° with a magnetic connection and mechanic security bock for a transversally installation between two lines of the profile. The Light Tube are only fed by one od the ends and do not communicate current through the other end. The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® by Casambi.