

FLOS


05.3210.ES Brushed Bronze

Magic Stick 100 Asymmetric Non Dimmable

Designed by Jorge Herrera, 2023

9.8W - 587lm - 2700K - CRI> 90 - Beam° 131

LED diffuse and accent lighting module for installation in the Zero Track Pro system. Can be adjusted by rotating from its axis located in an asymmetrical position. Electronic DC/DC converter incorporated. Individual control via DALI protocol and broadcast mode via 1-10V.

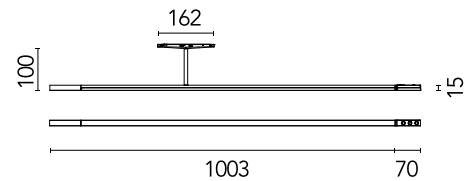

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Track
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Top LED
Number of lamps	1
Power (W)	9.8
System power (W)	12
Source flux (lm)	1160
Lumen Output (lm)	587

Physical

Colour	Brushed Bronze
Rotation (°)	360
Net weight (kg)	0.49
IP internal	20
IP external	20

Download

[Mounting instructions](#)  PDF

Photometric Files

[LDT / IES](#)  ZIP


Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



Schematic light drawing



Beam Angle: 131°

h(m)	E(lx)	D(m)
1	153	4.34
2	38	8.69
3	17	13.03
4	10	17.38
5	6	21.72

153 cd

Luminous flux luminaire
587 lm

Photometric

Lighting type	Direct
Light distribution	Asymmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
Rf fidelity index	89
Rg gamut index	96
LED Life / Failure Ratio	L80B10>50.000h_Tc65°C
Beam angle C0-180 (°)	131
Beam angle C90-270 (°)	112
Extreme cut off	No

Electrical

Insulation class	III
Forward voltage (V)	24
LED current (mA)	750
Power supply	Remote excluded
Dimmable	No
Power supply type	Non Dimmable

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class G

