

FLOS


05.3230.ER Brushed Steel

Magic Stick 145 Asymmetric Non Dimmable

Designed by Jorge Herrera, 2023

9.8W - 587lm - 2700K - CRI> 90 - Beam° 131

LED diffuse and accent lighting module for installation in the Zero Track Pro system. Can be adjusted by rotating from its axis located in an asymmetrical position. Electronic DC/DC converter incorporated. Individual control via DALI protocol and broadcast mode via 1-10V.

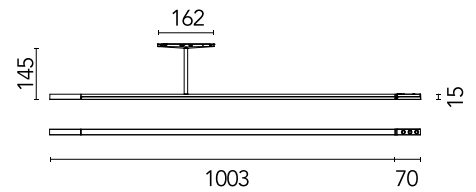

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

| | |
|------------------------|---------------------|
| Mounting | Track |
| Environments | Indoor dry location |
| Light source type | LED |
| Light sources included | Yes |
| LED type | Top LED |
| Number of lamps | 1 |
| Power (W) | 9.8 |
| System power (W) | 12 |
| Source flux (lm) | 1160 |
| Lumen Output (lm) | 587 |

Physical

| | |
|-----------------|---------------|
| Colour | Brushed Steel |
| Rotation (°) | 360 |
| Net weight (kg) | 0.49 |
| IP internal | 20 |

Download

[Mounting instructions](#)  PDF

Photometric Files

[LDT / IES](#)  ZIP


Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



Schematic light drawing



Photometric

| | |
|--------------------------|-----------------------|
| Lighting type | Direct |
| Light distribution | Asymmetric |
| CCT (K) | 2700 |
| CRI> | 90 |
| Rf fidelity index | 89 |
| Rg gamut index | 96 |
| LED Life / Failure Ratio | L80B10>50.000h_Tc65°C |
| Beam angle C0-180 (°) | 131 |
| Beam angle C90-270 (°) | 112 |

Electrical

| | |
|---------------------|-----------------|
| Insulation class | III |
| Forward voltage (V) | 24 |
| LED current (mA) | 750 |
| Power supply | Remote excluded |
| Dimmable | No |
| Power supply type | Non Dimmable |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class G

